



TOGETHER **WE BUILD**

MIXERS

PUMPS

SAWS

DUMPERS

2022-2023 EQUIPMENT CATALOG





TOLL FREE: 800.275.5463
WWW.IMERUSA.COM



TOGETHER WE BUILD

IMER USA, Inc.

423 Bank Street, Suite 180

Southlake, TX 76092

Tel. (800) 275-5463 - Fax (301) 336-6687

www.imerusa.com

Due to our ongoing Research and Development efforts these products and their specifications are subject to change without notice.

The California Office of Environmental Health Hazard Assessment Requires this Specific Warning: Cancer and Reproductive Harm - www.p65warnings.ca.gov

TABLE OF CONTENTS



MIXERS

BARREL MULTI-MIXERS	4
Wheelman II	6
Minuteman II	7
Multi-Mix 350	8
Workman II 250 & 350	9

SPIN SERIES MIXERS	10
Spin 15 A	10
Spin 30 Plus	11

VERTICAL SHAFT MIXERS	12
Mix-All 60	12
Mix 120 Plus	13
Mix 360	14
Mix 750	15

MIXER / PUMPS

CONTINUOUS MIXER / PUMPS	16
Koine 35	18
Koine 4	20

PROGRESSIVE CAVITY PUMPS	22
Mighty Small 50 PLUS	22
Step-Up 120 Single-Phase	24
Step-Up 120 Three-Phase	26
Step-Up 120 A	28
Prestige 300	30

CONCRETE PUMPS

PISTON PUMPS	32
Booster 20	32

SAWS

COMBICUT SERIES	34
Combicut 200 VA & 250 VA	36
Combicut 250 / 1000 & 1500	38
Combicut 350 iPower	39

MASONRY SERIES	40
Masonry 350 Smart	40
Masonry 750 Plus	41

SAW BLADES

IMER SAW BLADES	42
-----------------	----

CARRY DUMPERS

CARRY MINI-DUMPERS	44
Carry 105	46
Carry 105 Electric	47
Carry 107	48
Carry 107HT Hi-Tip Kit	49
Carry 108HF	50
Carry 150	51
Carry 230	52

SPECIALTY PRODUCTS

EZEE CLEAN	53
------------	----



MIXERS SERIES



MORTAR, STUCCO, GROUT, CONCRETE MIXERS

Multi-Mixers Continuous Mixers Vertical Shaft Mixers

IMER is known world-wide for its mixers due to its vast experience from small, portable mixers to its large batch plants. No matter how large or small the project may be, IMER has a solution to help you maximize your time and ROI. Designed to handle the most impossible of mix designs and aggregate types.

The IMER Multi-Mixers, Spin Series Continuous Mixers, and Vertical Shaft mixers are ideal for efficiently and quickly mixing all types of pre-blended materials from dry pack consistency to a fluid grout. Mortar one day, stucco the next. Tackle high-strength grouts the day after, or make them all in one day without any waste.

In addition, IMER Mixers are designed to work with IMER mixer/pump spray machines and grout pumps - the perfect companions for semi-automatic production.





WHEELMAN II

COMPACT, PORTABLE MULTI-MIXER



NOISE LEVEL
<63 DB

WHEELMAN II | Model # 1105421 | 110V/60Hz 0.5 HP | Poly Drum
WHEELMAN II | Model # 1105422 | 110V/60Hz 0.5 HP | Steel Drum *(New 2021)*
WHEELMAN II GAS | Model # 1105426 | 3 HP, Honda Engine | Poly Drum

LIGHTWEIGHT AND PORTABLE MIXER FOR MORTAR, STUCCO, GROUT, OR CONCRETE

The Wheelman II wheelbarrow-style mixer is built to tackle all types of projects and materials, such as mortar, stucco, grout, concrete, and is the only mixer with a removable drum that can be loaded by one person into a small vehicle. Use it to mix, transport, and then dump right to your work area. The Polyethylene drum is spun-injected, a plastic forming process that delivers a perfectly round and extra-durable drum. The optional 355° Swivel Stand is an excellent add-on for an easy to dump solution. Available with a Honda gas engine or an industrial-grade electric 110V motor. Choose a poly drum or the new metal drum model!



SPEED

Mix mortar, stucco, grout, or concrete in less than 4 minutes.

GAS POWER

Working on a jobsite without electrical power, no problem, the Wheelman is available with a 3 hp Honda engine.

POWER

The fully enclosed 1/2 hp 110V industrial grade motor with direct gear drive provides non-stop performance on any construction project. These mixers truly are contractor duty.

OPTIONAL 355° SWIVEL STAND

Wheelman stand is easy to dump, and it swivels a full 355°. Item # 1105490



Technical specifications

POWERED by
HONDA

	WHEELMAN II Gas	WHEELMAN II Electric
Drum capacity	5 cu ft	5 cu ft
Batch output	2.5 cu ft	2.5 cu ft
Motor rating	1/2 hp 110v/6amp	n/a
Gas engine*	n/a	Honda 3 hp
Drum diameter	24 in	24 in
Discharge outlet height	8 in / 21 in w/stand	8 in / 21 in w/stand
Wheel size	14 in pneumatic tires	14 in pneumatic tires
Weight	gas 115 lbs	elec. 101 lbs
Width**	26 (26) in	26 (26) in
Length**	46 (29) in	46 (29) in
Height**	36 (27-1/2) in	36 (27-1/2) in

(*) Warning: Cancer and Reproductive Harm - <https://www.p65warnings.ca.gov>
(**) Operating Dimensions (palletized)

MINUTEMAN II

PORTABLE MULTI-MIXER

MINUTEMAN II	Model # 1126608	110V/60Hz 0.5 HP	Steel Drum
MINUTEMAN II	Model # 1126632	110V/60Hz 0.5 HP	Poly Drum



BELTLESS GEAR-DRIVEN PORTABLE ELECTRIC MIXER

The Minuteman II is the highest performing, most reliable, affordable small portable mixer today. It is easy to assemble and transport plus the electric motor runs quietly making it perfect for indoor applications. The oil bath gearbox never needs maintenance like some other brands on the market. The Minuteman II has been used for the past 30+ years to mix mud to lay block, stucco houses, build patios, mix concrete pads, and more. Choose a metal or poly drum.



Technical specifications


MINUTEMAN II Electric	
Drum capacity	5 cu ft
Batch output	3 cu ft
Motor rating	1/2 hp 110v/6amp
Gas engine	n/a
Drum diameter	24 in
Discharge outlet height	21 in
Wheel size	10 in tires
Weight*	120 lbs
Width*	28 (26) in
Length*	52 (26) in
Height*	57 (27) in

(*) Operating Dimensions (palletized)



PORTABILITY

In just one minute, the Minuteman or Wheelman can be "knocked down" into easy-to-load components. All this by one person, with no tools required.



MULTI-MIX 350 SYNTESI

PORTABLE MULTI-MIXER



MULTI-MIX 350 | Model # 1105802 | 110V/60Hz 1.9 HP

THE MULTI-MIX 350 IS IMER'S NEW PORTABLE, NON-TOWABLE MIXER. MORTAR, STUCCO, GROUT, OR CONCRETE - BIG BROTHER TO THE WHEELMAN II AND MINUTEMAN II MIXERS

Designed and built to mix large batches in a portable 110V traditional concrete mixer. The transmission system inserted in the arm and the convenient worm screw tilting system makes it noiseless and lightweight, and at the same time, sturdy and reliable.



PERFORMANCE MIXING BLADES

The Multi-Mix 350 blades are heavy-duty construction, welded and screwed for added strength and a consistent mix.



QUIET GEARBOX

Direct drive gearbox to the drum, no more external drive gears. This drive system is whisper quiet and is sealed for life. No maintenance is required.

Technical specifications

MULTI-MIX 350	
Drum capacity	12 cu ft
Batch output	9.5 cu ft
Drum diameter	34-3/4 in
Wheel size	15 in
Electric motor power rate	1.9 hp 110v
Weight*	385 lbs
Width*	32-1/2 in
Length*	63-1/4 in
Height*	63 in

(*) Operating Dimensions (palletized)

WORKMAN II 250 & 350

TOWABLE MULTI-MIXER

WORKMAN II 250 GAS
WORKMAN II 250 E
WORKMAN II 250 E
WORKMAN II 350 GAS
WORKMAN II 350 E
WORKMAN II 350 E

Model # 1105850
 Model # 1105842
 Model # 1105843
 Model # 1105855
 Model # 1105862
 Model # 1105863

5.5 HP Honda GX
 110V/60Hz 1.5 HP, Single-Phase
 220V/60Hz 1.5 HP, Single-Phase
 5.5 HP Honda GX
 110V/60Hz 1.5 HP, Single-Phase
 220V/60Hz 1.5 HP, Single-Phase



NOISE LEVEL
<79 DB

Models Without Motors
 1105851 - Workman II 250
 1105856 - Workman II 350

MIX PERFECT MORTAR AND CONCRETE

The Workman II 250 and 350 Multi-mixers are the contractor's choice for heavy-duty mixers. IMER's steel drum towable mixers are easy to use, easy to maintain, durable, reliable, and long-lasting. Available in a full range of sizes and engine and motor configurations.



Technical specifications

POWERED by
HONDA

	WORKMAN II 250	WORKMAN II 350
Drum capacity	9 cu ft	12 cu ft
Batch output	6 cu ft	9.5 cu ft
Drum diameter	29-1/2 in	34-3/4 in
Discharge outlet height	27-3/4 in	26-1/2 in
Pneumatic wheels	20 in	20 in
Gas engine*	5.5 hp Honda	5.5 hp Honda
Electric motor rating	1.5 hp 110/220v	1.5 hp 110/220v
Weight	525 lbs	650 lbs
Width**	50 (50) in	50 (50) in
Length**	72 (80) in	76-1/2 (86) in
Height**	55 (68) in	56 (72) in

(*) Warning: Cancer and Reproductive Harm - <https://www.p65warnings.ca.gov>
 (**) Operating Dimensions (palletized)




POWER OPTIONS

A variety of industrial duty options -- Honda gas engines and electric motors are available too.




"POSI-LOCK" SAFETY FEATURE

When you stop rotating the dump wheel it locks in place, automatically.



QUIET GEARBOX

A direct drive gearbox to the drum means no more external drive gears. The drive system is whisper quiet and is sealed for life. No maintenance required.



WHY PAY EXTRA FOR A HITCH?

Every Workman II mixer comes with a commercial-duty tow hitch.

SPIN 15A



CONTINUOUS MIXER FOR PREMIXED MATERIALS



SPIN 15A | Model # 1106340 | 110V/60Hz, 1.75 HP

INDUSTRY CHANGING, HIGH-OUTPUT CONTINUOUS MIXERS

Ideal for quickly and efficiently mixing; preblended plasters, mortars, stuccos, grouts, self-leveling underlayments, preblended conventional floor-screeds. Team the continuous mixer with an IMER spray and grout pump for semi-automatic production.

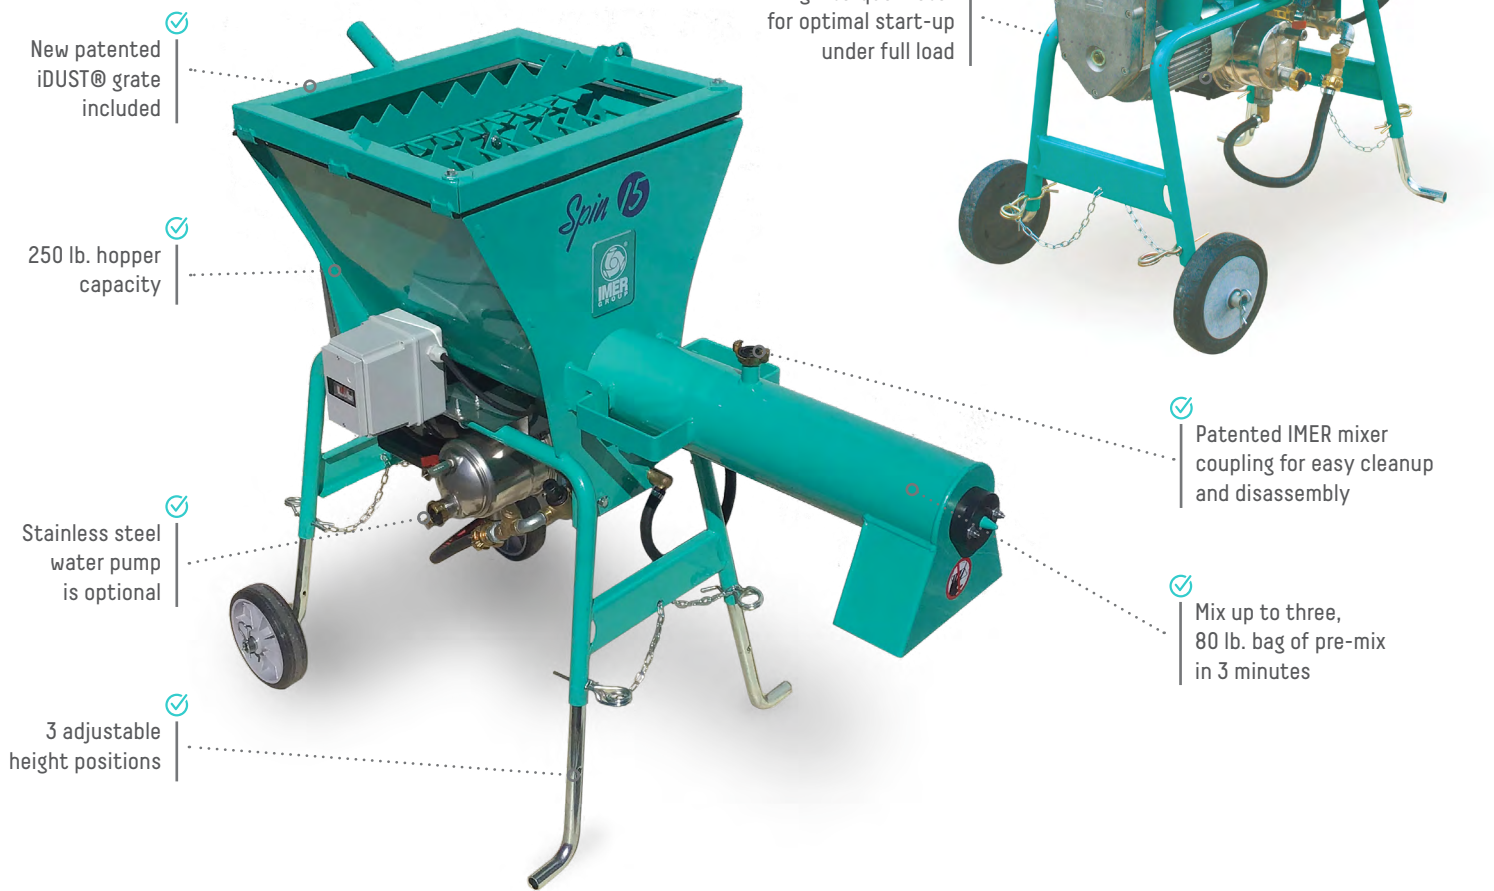


DUST GRATE INCLUDED

The Spin 15 & Spin 30 Plus include an iDUST® dust grate attachment. The dust grate attachment utilizes multiple vents and connects to a dry vacuum to pull dust downward.

OPTIONAL WATER PUMP

Optional water kit for spin 15. Use the pump to feed water from a tank or when the water supply is inadequate. Item# 1107638 - Spin 15A Water Pump Kit



Technical specifications

	SPIN 15A
Hopper/tank capacity	2.12 cu ft
Mixing performance	.5 cu ft /min
Mixer/paddle speed	280 rpm
Motor power rate	1.75 hp
Standard water pump	optional
Standard dust grate	yes
Weight (with packing)	187 lbs (196)
Dimensions	27-½ W x 54 L x 46 H in
Box dimensions	31-½ W x 23-¼ L x 32-½ H in

SPIN 30 PLUS

CONTINUOUS MIXER FOR PREMIXED MATERIALS

SPIN 30 PLUS

Model # 1106152

220V/60Hz, 3 HP, Single-Phase



NOISE LEVEL
<65 DB




Technical specifications

SPIN 30 PLUS

Hopper/tank capacity	500 lbs
Mixing performance	1 cu ft /min
Mixer/paddle speed	280 rpm
Motor power rate	3 hp (220v single-phase)
Standard water pump	yes
Standard dust grate	yes
Weight (with packing)	281 lbs (292)
Dimensions	25 W x 71 L x 46 H in


SPIN 15 & SPIN 30 SAFETY

Safety sensor disables mixer if the mixing chamber is opened.



WATER FLOW METER

Allows the water level to be set for easy setup when using the same material.



MIX-ALL 60


PORTABLE PADDLE MIXER



MIX-ALL 60 | Model # 1193988 | 110V/60Hz, 0.75 HP

THE LIGHTWEIGHT, QUIET, PORTABLE YET POWERFUL MIX-ALL 60 SAVES TIME AND REDUCES LABOR COSTS

The 110V motor gearbox drivetrain is both powerful, and quiet. The unique paddles allow it to quickly and thoroughly mix mortar, stucco, thin set, dry pack mortar, epoxy, plaster, and more. It's also used for mixing rubber materials.

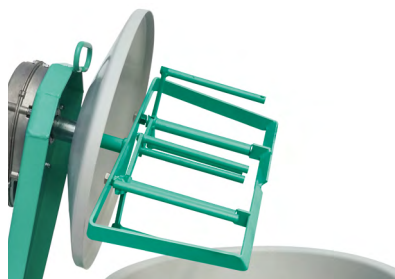

PADDLES

The Mix-All 60 includes a paddle specifically engineered for mixing mortar, stucco, and grout. Additional paddle attachments are available as an accessory on the new Mix-All or previous models.

LABOR SAVINGS

The Mix-All 60 batches material automatically, freeing the operator for other duties. Handheld drill motors require the full attention of the operator.



POWER

The fully enclosed 3/4 hp 110V industrial grade motor with direct gear drive provides non-stop performance on any construction project. The Mix-All 60 mixer truly is contractor duty.

MINIMAL JOBSITE CLEAN UP

The Mix-All 60 makes batch after batch without slinging or splashing material onto the floor or wall. Easy to use. Easy to clean up.

Technical specifications

	MIX-ALL 60
Drum capacity	14 gal
Batch output	12 gal / 50 lb bag
Drum diameter	24 in
Maximum aggregate size	3/8 in
Paddle speed	55 rpm
Motor rating	3/4 hp, 110v
Current draw	10 amps
Noise	70 dB(A)
Machine weight (boxed)	66 lbs (70 lbs)
Width*	23 (23) in
Length*	25 (24-1/2) in
Height*	31-1/4 (18) in

(*) Operating Dimensions (boxed)

MIX 120 PLUS MORTARMAN

PORTABLE VERTICAL SHAFT PADDLE MIXER

MIX 120 PLUS | Model # 1194302 | 110V/60Hz, 2 HP, Single-Phase, iDUST® Grate

MIX 120 PLUS | Model # 1194304 | 110V/60Hz, 2 HP, Single-Phase, Open Grate



✓
Loading wheels
help to place the
mixer in the pickup
for transportation

✓
2 HP, 110V motor
with gearbox drive
with reverse

✓
Transport wheels
to help maneuver
the mixer where
you need it

Technical specifications

MIX 120 PLUS	
Drum capacity	4.25 cu ft
Batch output	3 cu ft
Drum diameter	30 in
Maximum aggregate size	3/8 in
Paddle speed	38 rpm
Motor rating	2 hp, 110v
Current draw	15 amps
Noise	70 dB(A)
Machine weight (crated)	286 lbs (310 lbs)
Width*	30 (31) in
Length*	33 (35) in
Height*	50 (38) in

(*) Operating Dimensions (crated)



OUTLET

Discharge of material is very controlled. Whether you need a trowel, a bucket, or a wheelbarrow full of material, it's all there with a twist of your arm. Viewing the MIX 120 discharge as seen from below.

MIX ANYWHERE

The 120 Plus passes through standard doorways, gates, and more. The mixing action is neat and controlled, so the mud stays in the drum, and the mixed discharge is equally clean. Mix indoors without the mess or added clean-up.

VERTICAL SHAFT MIXER WITH A POWERFUL MIXING ACTION

The Mix 120 Plus can make a wheelbarrow of mortar, stucco, grout, or dry pack cement every 3 minutes. Vertical shaft mixers deliver so much mixing torque that the Mix 120 Plus can out produce a two-bag towable mixer when making dry pack cement. Team the continuous mixer with an IMER spray and grout pump for semi-automatic production.




DUST GRATE INCLUDED

The Mix 120+ includes the iDUST® Dust grate attachment. The iDUST® attachment fits on top of the 120+ and connects to a HEPA dry vacuum to safely pull dust downward.



OPEN GRATE OR iDUST® GRATE

When ordering, choose from the iDUST® grate or the open grate. Open grate shown here.



WHY VERTICAL SHAFT MIXERS?

The paddles are always in the mix, thoroughly and quickly mixing materials without air entrapment. Shown here with rubber paddles (item # 1107618).

REVERSE IT

If the material being mixed starts to clump up or separate, no problem, just hit reverse for a few seconds, then back to forward. The ability to switch from forward to reverse ensures that all types of materials mix well and production keeps moving.

MIX 360 MORTARMAN

TOWABLE VERTICAL SHAFT PADDLE MIXER



NOISE LEVEL
<79 DB

Model Without Motors
1194585 - Mix 360 Plus

MIX 360	Model # 1194574	220V/60Hz, 5 HP, Single-Phase
MIX 360	Model # 1194575	220V/60Hz, 5 HP, 3 Phase
MIX 360	Model # 1194576	440V/60Hz, 5 HP, 3 Phase
MIX 360 GAS	Model # 1194578	11 HP Honda GX

THE MIX 360 OFFERS UNPARALLELED PRODUCTION AND JOBSITE / PLANT SAFETY

Vertical shaft mixers use the principles of concrete batch plant design, which allows for the paddles to rotate through the mix rather than lift and drop it as conventional mortar mixers do. The Mix 360 vertical shaft towable mixer easily mixes very low slump materials like dry pack mortar and refractory cement, as well as UHPC.



OPTIONAL DUST GRATE

Take control of dust. Easily attach IMER's iDUST® dust grates to the Mix 360 and attach a vacuum. Watch the dust be pulled downward, away from operators (Item# 1107494)



ACCESSORIES FOR SAFETY

The standard open grate is ideal for materials such as fireproofing.

RELIABILITY

The paddle systems are powered by monster gearboxes which were developed in our batch plant division.


Mixing loads with 3/8 in aggregates is no problem.



PRODUCTION

Listening, studying, and testing have lead to drum and paddle design changes that vastly improve batch output.

Why not have Mini Batch Plant (MBP) production for the cost of a mortar mixer?



INDUSTRIAL ELECTRIC MOTOR

The motors used in the MIX 360 and 750 are industrial-duty electric motors available in a wide range of voltage, single-phase or three-phase. The motors can operate continuously and easily mix stiff, dry materials.



MIX 750 MORTARMAN

TOWABLE VERTICAL SHAFT PADDLE MIXER

MIX 750	Model # 1194644	220V/60Hz, 5 HP, Single-Phase
MIX 750	Model # 1194645	220V/60Hz, 7.5 HP, 3 Phase
MIX 750	Model # 1194646	440V/60Hz, 7.5 HP, 3 Phase
MIX 750 GAS	Model # 1194648	13 HP Honda GX



NOISE LEVEL
<79 DB

Model Without Motors
1194640 - Mix 750 Plus

PRODUCE 18 CUBIC FEET OF MUD EVERY THREE TO FOUR MINUTES WITH THE MIX 750

The Mix 750 is the perfect partner for busy precast mixing operations, and on bridge and highway jobs. The discharge system is easy to open and close and protected from being hit by a mud bucket or forklift. The safety grate is hinged, making access immediate. The Mix 750 is Mini-Batch Plant production for a fraction of the cost. These mixers develop vast amounts of mixing power, far more than any horizontal shaft mortar mixer. The ability to mix refractory mud or stiff, dry materials is unparalleled in the industry.



Technical specifications

POWERED by
HONDA

	MIX 360	MIX 750
Drum capacity	12 cu ft	22 cu ft
Batch output*	9 cu ft	18 cu ft
Drum diameter	38 in	52 in
Maximum aggregate size	3/8 in	3/8 in
Discharge outlet height: max/min	30/18 in	29/23 in
Pneumatic wheels	18 in	22 in
Weight: electric/gas	787/794 lbs	1,588 lbs
Electric motor rating	5 hp 220v 1ø or 3ø	5 hp 220v 1ø / 7.5 hp 220v 3ø
Gas engine*	11 hp Honda	13 hp Honda w/elec. start
Width***	44 (50) in	63 (64) in
Length***	59 (80) in	90 (86) in
Height***	58 (56) in	62 (64) in



SET UP

The stability legs slide outward to accommodate a wide variety of mud pans. They can also be adjusted up or down depending upon the desired discharge height.

These extra wide stability legs are standard on the Mix 750 and are available as an option on the Mix 360.

(*) Materials can influence the batch output (**) Warning: Cancer and Reproductive Harm - <https://www.p65warnings.ca.gov>
(***) Operating Dimensions (palletized)

PUMP SERIES



MORTAR, STUCCO, GROUT & CONCRETE PUMPS

Continuous Pumps Progressive Cavity Pumps Piston Pumps

Contractors prefer the reliability, quality, and versatility of IMER's family of pumps. Our proven history and experience in the construction industry throughout the world offer contractors security and unmatched productivity for every project requiring pumping, no matter the size of the project or size of the aggregate used.


IMER offers a wide variety of pumps and a wide range of accessories, all specifically designed and fully engineered to handle a multitude of applications providing your operation versatility and more opportunity to use the pumps daily, increasing your ROI.

Pumping of grouts, self-leveling underlayments, spraying fireproofing, mortar, and stucco setup, low volume shotcrete is just the beginning of the applications IMER pumps were engineered to tackle - and to outperform competitive pumps that only handle one type of pumping application.

Trust the brand with years of experience, engineering excellence, and superior quality.

Trust the brand contractors prefer.



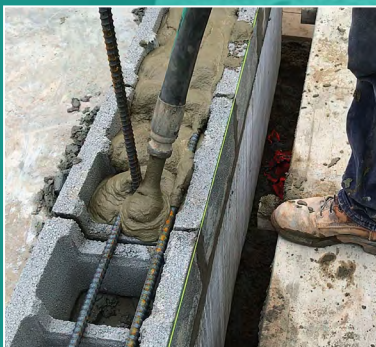

KOINE 35

CONTINUOUS MIXER / PUMP: HF (HIGH FLOW) CONTINUOUS PUMP FOR PREBLENDED CEMENTITIOUS MATERIALS



KOINE 35 | Model # 1106051 | 5 HP, Single-Phase

CONTINUOUS OPERATION MEANS EFFICIENT AND EFFECTIVE PRODUCTION

The Koine 35 mixer and pump is one of the most advanced and versatile production pumps on the market today. It is packed with features that allow it to tackle a multitude of applications, yet it is compact and highly portable, making it perfect for interior or high-rise building work.

The Koine 35 is capable of continuous mixing, spraying, and pumping of pre-blended cementitious and gypsum-based mortars, stucco, fireproofing, self-leveling underlayments, and grouts.




DUST GRATE INCLUDED

Take control of dust. Easily attach IMER's iDUST® dust grate and attach a vacuum, watch the dust pull downward, away from operators.

CONTINUOUS FEED














The continuous feed impeller blade makes sure that materials are broken up and ready to be mixed while the angle of the delivery chute drops the materials into the mixing chamber at a controlled rate.



Technical specifications

KOINE 35	
Power supply	220v/60Hz, single-phase
Total machine power requirement	5 hp
Drive motor	3 hp
Feeding impeller motor	1/2 hp
Water pump	1 hp
Material flow rate	Up to 60 cu ft/hr
Maximum pumping distance	300 ft
Loading height	36 in
Dimensions	27 W x 62 L x 47 H in
Weight	510 lbs

(*) The pumping distance will vary depending upon the type of material being used.


KOINE 35 APPLICATIONS				
 STANDARD ROTOR / STATOR D8 - 1.5 Rotor with tab Part # 1107029 D8 - 1.5 Stator Part # 1107028	Pumping of grouts, self-leveling underlayments	Spraying fireproofing	Spraying mortar, stucco base coat (1/8" or more of build-up)	Spraying waterproofing, stucco, finish coat
Product / Part #	A	B	C	D
 Dual-diaphragm compressor Part # 1107637		✓	✓	✓
 52' x 13 mm Air hose w/Geka - Part # 1107532 33' x 25 mm Air hose w/Geka - Part # 1107531		✓	✓	✓
 Mortar, stucco, and fireproofing gun kit Part # 1107005		✓	✓	
 Stucco and fine coatings gun kit Part # 1107010				✓
 D5 - 2.5 Rotor - Part # 1107085 (requires manifold - part # 3223416)	✓	✓	✓	✓
 D5 - 2.5 Stator - Part # 1107084 (requires manifold - part # 3223416)	✓	✓	✓	✓
 D8 - 1.5 Rotor - Part # 1107031 (requires manifold - part # 3223416)	✓	✓	✓	✓
 D8 - 1.5 Stator - Part # 1107030 (requires manifold - part # 3223416)	✓	✓	✓	✓
 Manifold for D Series stators Part # 3223416	✓	✓	✓	✓
 SLU mixing paddle Part # 1107597	✓			
 5' Overhead wand Part # 1107549		✓	✓	
 50' x 25 mm Material hose - Part # 1107525 33' x 25 mm Material hose - Part # 1107526 16' x 25 mm Material hose - Part # 1107527	✓	✓	✓	✓

✓ Required ✓ Optional

STANDARD EQUIPMENT

- Dust grate with Vacuum port
- D8 - 1.5 stator and rotor w/tab
- Turbo mixer kit with material delivery pressure gauge
- Gear-driven feed impeller
- Control panel w/ exclusive IMER 4-speed inverter
- Self-priming water booster pump
- Water system with flow meter and drainage valves
- 66' of power cord
- 66' of water hose Ø 19 mm (3/4")
- 50' of material hose Ø 25 mm (1")
- 35 mm to 25 mm reducer
- Hose cleaning kit with toolbox
- Mixing chamber clean out tool
- Air compressor-ready

CONTROL PANEL SINGLE-PHASE

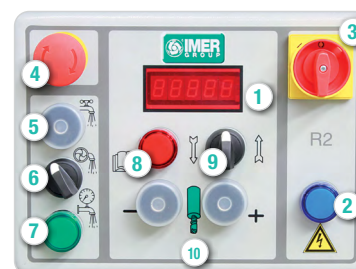

- 1 Smart display panel
- 2 Current indicator light
- 3 ON/OFF switch
- 4 Emergency stop button
- 5 Manual water control
- 6 Water booster pump switch
- 7 Water pressure indicator
- 8 Mixing chamber safety sensor
- 9 Forward/Reverse
- 10 Rotor/stator speed control

KOINE 4

CONTINUOUS MIXER / PUMP: HF (HIGH FLOW) CONTINUOUS PUMP FOR PREBLENDED CEMENTITIOUS MATERIALS



NOISE LEVEL
<65 DB

KOINE 4 | Model # 1106004 | 220V/60Hz, 9 HP, 3 Phase

A POWERFUL, VERSATILE CONTINUOUS PUMP

The Koine 4 continuous pump is designed to provide high levels of volume and production. The Koine 4 is used almost exclusively for mixing and pumping core fill grouts, wall grouts, and self-leveling underlayments for those projects where you need tremendous production. The Koine series of pumps make your mixing and pumping automatic.

✓
Electric motor is thermally protected

✓
Phase converter switch means you will not have to manually swap wires depending on the current's polarity

✓
Includes adjustable R8 - 1.5 rotor / stator
Pressure: bar 15 (PSI 218)
Flow rate at 400 rpm: 80 l/min (Gal/min 21)

✓
100% duty-cycle 7.5HP electric motor with a gearbox drive reduction system

✓
When needed the mixing chamber and the compressor can be removed quickly to make it even easier to move the Koine 4 from place to place

✓
Store all your accessories in this handy toolbox. Never lose pieces

✓
Use the stainless steel water pump to suck from a tank when there is no direct water supply



TURBO MIXER

The turbo mixer provides increased shear and blending of the material before it enters the hoses

DUST GRATE INCLUDED














Take control of dust. Easily attach IMER's iDUST® dust grate and attach a vacuum, watch the dust pull downward, away from operators.



Technical specifications

KOINE 4	
Power	220v/60Hz, 3 phase
Total machine power	9 hp
Drive motor power	7.5 hp
Feeding impeller motor	1 hp
Water booster pump	1 hp 70 psi boost
Material flow rate	140 cu ft / h
Max. pumping distance - grouting/fireproofing*	200 ft +
Max. pumping distance - self-leveling*	300 ft +
Gearbox speed	400 rpm
Loading height	35-½ in
Dimensions	29 W x 47 L x 61-½ H in
Weight	574 lbs

(*) The pumping distance will vary depending upon the type of material being used.

KOINE 4 APPLICATIONS				
	STANDARD ROTOR / STATOR R8 - 1.5 Rotor with tab - Part # 1107623 R8 - 1.5 Stator - Part # 1107622	Pumping of grouts, self-leveling underlayments	Spraying fireproofing	Low volume shotcrete
	Product / Part # Dual-diaphragm compressor, 3 phase Part # 1107680	A	B	C
	52' x 13 mm Air hose w/Geka - Part # 1107532 33' x 25 mm Air hose w/Geka - Part # 1107531		✓	✓
	Koine gun kit Part # 1107005		✓	✓
	5' Overhead wand Part # 1107549		✓	✓
	33' x 35 mm Material hose Part # 1107528	✓	✓	✓
	35 mm - 25 mm Reducer Part # 1107565		✓	✓
	R7 - 1.5 Rotor with tab Part # 1107664	✓	✓	✓
	R7 - 1.5 Stator Part # 1107624	✓	✓	✓
	R7 - 2.5 Rotor with tab Part # 1107667	✓	✓	✓
	R7 - 2.5 Stator Part # 1107668	✓	✓	✓
	Mixing paddle for light materials Part # 1107541		✓	
	Spray gun for Koine Part # 1107641			✓

✓ Required ✓ Optional

STANDARD EQUIPMENT

- Dust grate with vacuum port
- R8 Stator and rotor with tab
- Turbo mixer kit with material delivery pressure gauge
- Gear-driven feed impeller
- Self-priming stainless steel water pump
- Water system with flow meter and drainage valves
- 35 mm hose cleanout adapter
- 133' electric cord
- 130' water hose Ø 19 mm (3/4")
- 33' material hose Ø 35 mm (1-3/8") with camlock fittings
- Integrated tool storage box
- Clean up kit (scraper and sponge)

CONTROL PANEL THREE-PHASE



- 1 ON/OFF switch
- 2 Emergency stop button
- 3 Rotor/stator control
- 4 Manual water output switch
- 5 Feeding wheel ON/OFF
- 6 Water pump ON/OFF
- 7 Electrical current indicator
- 8 Emergency stoplight
- 9 Water pressure indicator
- 10 Reverse switch

MIGHTY SMALL 50 EVO & PLUS

PROGRESSIVE CAVITY PUMP: SCREW PUMP FOR PUMPING AND SPRAYING APPLICATIONS



MIGHTY SMALL 50 EVO
MIGHTY SMALL 50 PLUS

Model # 1106344


110V/60Hz, 1.75 HP

Model # 1106345


230V/60Hz, 3 HP, Single-Phase

THE MOST VERSATILE MIGHTY SMALL PUMP AND SPRAY MACHINE ON THE MARKET

The Mighty Small 50 EVO & PLUS models are an easily portable multi-purpose pump and spray machine. You may configure the pump with many different accessories depending on the required application. Whether it is pumping grout into forms, on a bridge deck repair project, spraying fireproofing on a high-rise building, or filling blocks with grout, our pumps are the right solution when you have a rigorous pumping application.

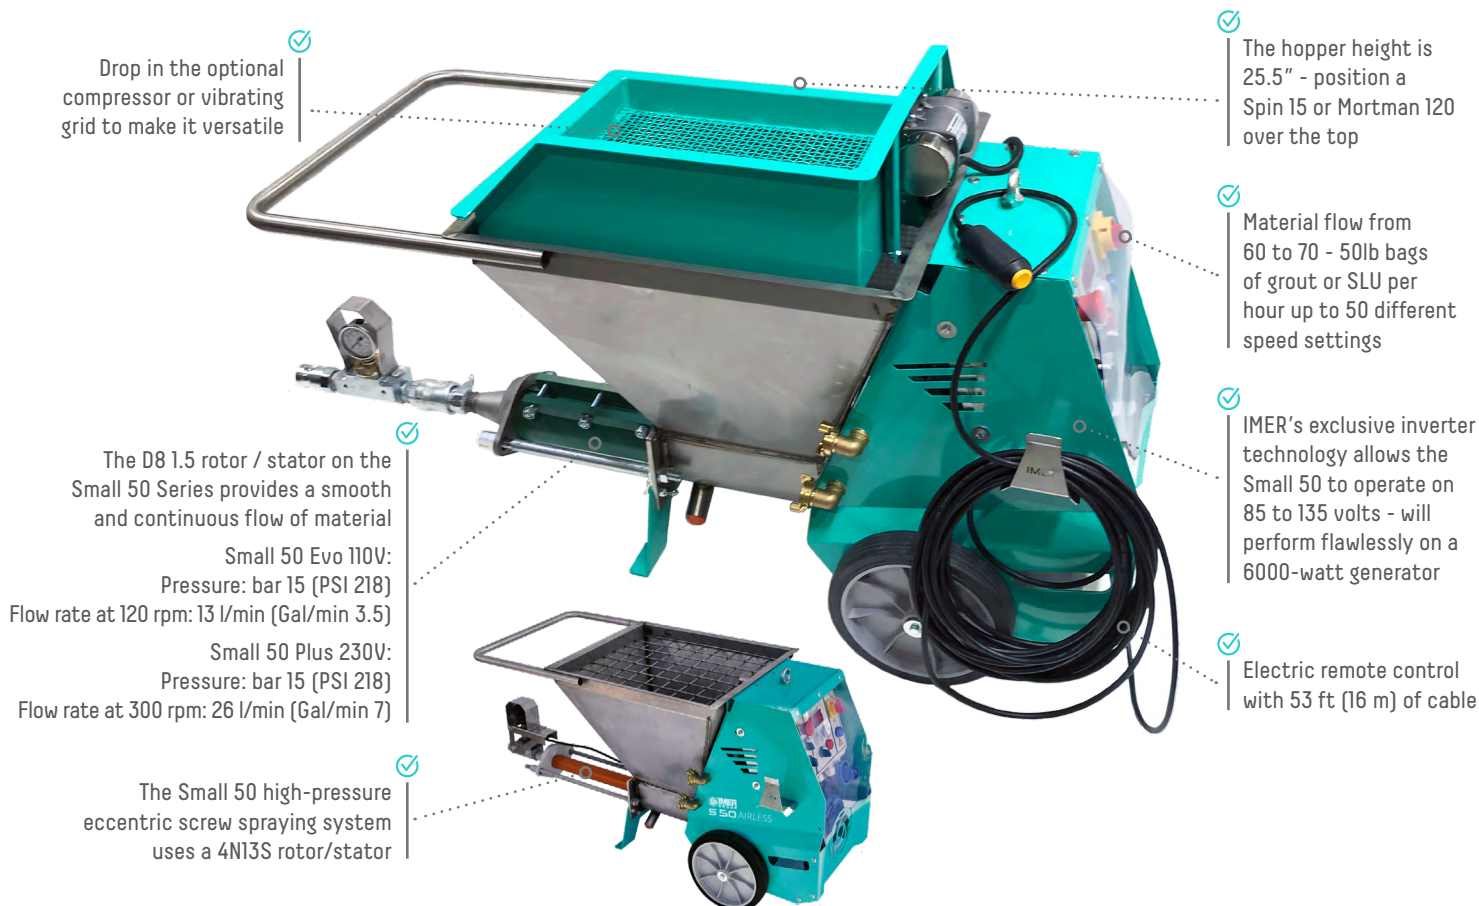

CONTROL PANEL


















- 1 On/Off switch
- 2 Rotor/stator speed control
- 3 Emergency stop button
- 4 Vibrating grate switch
- 5 Rotor/stator forward/reverse
- 6 Safety default light
- 7 Current supply light
- 8 LED code display

Technical specifications

	SMALL 50 EVO	SMALL 50 PLUS
Power supply	110v/60Hz	230v/60Hz
Pump motor	1.75 hp	3 hp
Material flow rate	1.7 - 30 cu ft / hr	1.7 - 54 cu ft / hr
Max. aggregate size	3/16 in	1/4 in
Max. pumping distance hose w/grout	100 ft	150 ft
Max. pumping distance hose w/SLU	150 ft	200 ft
Hopper capacity CF	1.75 cu ft	1.75 cu ft
Loading height	25-1/2 in	
Dimensions	20-1/2 W x 44 L 25-1/2 H in	
Weight	90 lbs	100 lbs
Sound pressure level	< 74 dB(A)	

(*) The pumping distance will vary depending upon the type of material being used.

 STANDARD ROTOR / STATOR D8 - 1.5 Rotor Part # 1107031 D8 - 1.5 Stator Part # 1107030	MIGHTY SMALL 50 PLUS APPLICATIONS					
	Pumping of grouts, self-leveling underlayments	Spraying fireproofing, repair mortar, stucco base coat (1/8" or more of build-up)	Spraying waterproofing, acrylic stucco, finish coats (1/8" or less of build-up)	Controlled pressure grout injection with pressure regulator	Tuck-pointing and grouting	Airless Spraying
Product / Part #	A	B	C	D	E	F
 Dual-diaphragm compressor Part # 1107546		✓	✓			
 53' x 13 mm Air hose w/Geka - 1107532 33' x 25 mm Air hose w/Geka - 1107531		✓	✓			
 Mortar, stucco, and fireproofing gun kit Part # 1107005		✓				
 Paint and fine coatings gun kit Part # 1107010			✓			
 Grout injection kit Part # 1107006				✓		
 Tuckpointing gun kit with 19 mm reducers Part # 1107504					✓	
 33' x 19 mm Material hose Part # 1107529			✓		✓	
50' x 25 mm Material hose - Part # 1107525 33' x 25 mm Material hose - Part # 1107526 16' x 25 mm Material hose - Part # 1107527	✓	✓	✓		✓	
 5' Overhead wand Part # 1107549		✓				
 Vibrating hopper for tuckpointing Part # 1107015	✓				✓	
 Vibrating screen for bulk sand mixes Part # 1107548	✓				✓	
 Pipe hook for block, form and door jamb filling - Part # 1107570	✓					
 D5 - 2.5 Rotor - Part # 1107085 D5 - 2.5 Stator - Part # 1107084	✓	✓	✓	✓	✓	
 Small 50 Plus - Airless spray kit Part # 1107669						✓
 Spin 15A Mixer (for 100V) - Part # 1106340	✓	✓			✓	
Spin 30 Plus Mixer (for 220V) - Part # 1106152	✓	✓				

✓ Required ✓ Optional

STANDARD EQUIPMENT **MIGHTY SMALL 50**

- Rotor and stator D8 - 1.5
- Stainless steel hopper
- Inverter driven control panel
- Electric remote control cable
- Pressure gauge for material pressure
- Accessory toolbox

AIRLESS SPRAY KIT **MIGHTY SMALL 50 - (New 2021)**

- Stator 4N13S - [Part # 1107220](#)
- Rotor 4N13S - [Part # 1107221](#)
- AG19 Gun - [Part # 1107643](#)
- Nozzle kit (Nozzles; 617, 619, 531, and 335)
- Filter kit (10 pcs kit green airless filter - [Part # 1107650](#)) and 10 pcs kit white airless filter - [Part # 1107651](#))
- Safety sensor, pressure gauge and cable
- 66' Airless hose (1/2") - [Part # 1107654](#)
- Gun cleaning kit - [Part # 1107658](#)

STEP-UP 120 SINGLE PHASE

PROGRESSIVE CAVITY PUMP: SCREW PUMP FOR PUMPING AND SPRAYING APPLICATIONS



STEP-UP 120 | Model # 1106180 | 220V/60Hz, 3 HP, Single-Phase

THE STEP-UP 120 SERIES OF SPRAY AND GROUT PUMPS

When you need more power to push through stiffer material or need more volume, then look no further than the Step-Up 120 series of pumps. The Step-Up 120 is a towable but very compact pump suited for unique pumping situations and environments. These pumps are extremely versatile. Pump or spray mortars, stuccos, grouts, restoration mortars, underlayments, fireproofing, waterproofings, along with many other materials. Shown with the Step-Up 120 pan mixer for continuous mixing and pumping.



DUST GRATE FOR ADDED SAFETY

Take control of dust. Easily attach IMER's iDUST® dust grate and attach a vacuum, watch the dust pull downward, away from operators.



COMPRESSOR

The dual-diaphragm "V" stroke compressor provides ample air for spray applications – Continuous duty rated and maintenance-free.




Technical specifications

	STEP-UP 120 1P
Motor power rate	3 hp
Mixer power rate	2 hp
Electric compressor	1 hp / 9 cfm
Max aggregate size	1/4 in
Maximum flow rate	1.5 cu yd
Horizontal pumping distance (*)	200 ft
Vertical pumping distance (*)	100 ft
Hopper capacity	4.25 cu ft
Dimensions	33 W x 80 L x 38 H in
Weight	616 lbs

(*) The pumping distance will vary depending upon the type of material being used.


STEP-UP 120 APPLICATIONS				
	STANDARD ROTOR / STATOR IM25L Rotor Part # 1107111 IM25L Stator Part # 1107110	Pumping of grouts, self-leveling underlayments	Spraying fireproofing	Spraying mortar, stucco base coat (1/8" or more of build-up)
Product / Part #		A	B	C
	Dual-diaphragm compressor Part # 1107602			
	53' x 13 mm Air hose w/Geka - 1107532 33' x 25 mm Air hose w/Geka - 1107531			
	Non-towing wheel kit Part # 1107633			
	Step-Up 120 pan mixer, Single Phase Part # 1107596			
	120' Remote control Part # 1107574			
	Remote control extension cable Part # 1107544			
	Spin 30 continuous mixer with iDust grate - Part # 1106152			
	33' x 35 mm Material hose Part # 1107528			
	50 mm to 35 mm material hose reducer Part # 1106178			
	Vibrating grate Part # 1107592			
	2L6 Rotor/stator kit Part # 1107088			
	Spray gun Step-Up 120 Part # 1107577			
	Pintle tow ring Part # 1107161			
	5' Overhead wand - Part #1107549 (requires reducer hose - part # 1107074)			
	16' x 35 mm male to 25 mm male hose Part #1107074			

 Required  Optional

STANDARD EQUIPMENT SINGLE-PHASE

- 3 HP Single-Phase 100% duty-cycle motor
- IM25L Rotor/stator
- Inverter Control panel
- 66' power cord
- Remote control ready
- Tow kit
- Grate for premixed materials
- Accessory toolbox

CONTROL PANEL SINGLE-PHASE

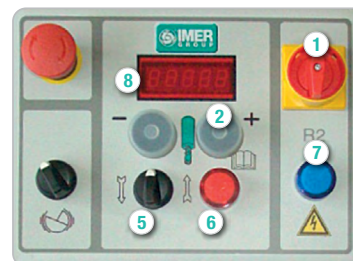

- 1 On/Off switch
- 2 Rotor/stator speed control
- 3 Emergency stop button
- 4 Vibrating grate switch
- 5 Rotor/stator forward/reverse
- 6 Safety default light
- 7 Current supply light
- 8 Diagnostic display

STEP-UP 120 THREE PHASE


PROGRESSIVE CAVITY PUMP: SCREW PUMP FOR PUMPING AND SPRAYING APPLICATIONS




STEP-UP 120 | Model # 1106181 | 220V/60Hz, 7.5 HP, 3 Phase

THE STEP-UP 120 SERIES SPRAY AND GROUT PUMPS

Pump or spray mortars, stuccos, grouts, restoration mortars, underlayments, fireproofing, waterproofing, and many other materials. The 3 phase power gives you more horsepower to push material further and with more flow and grouts up to 3/8" aggregate.

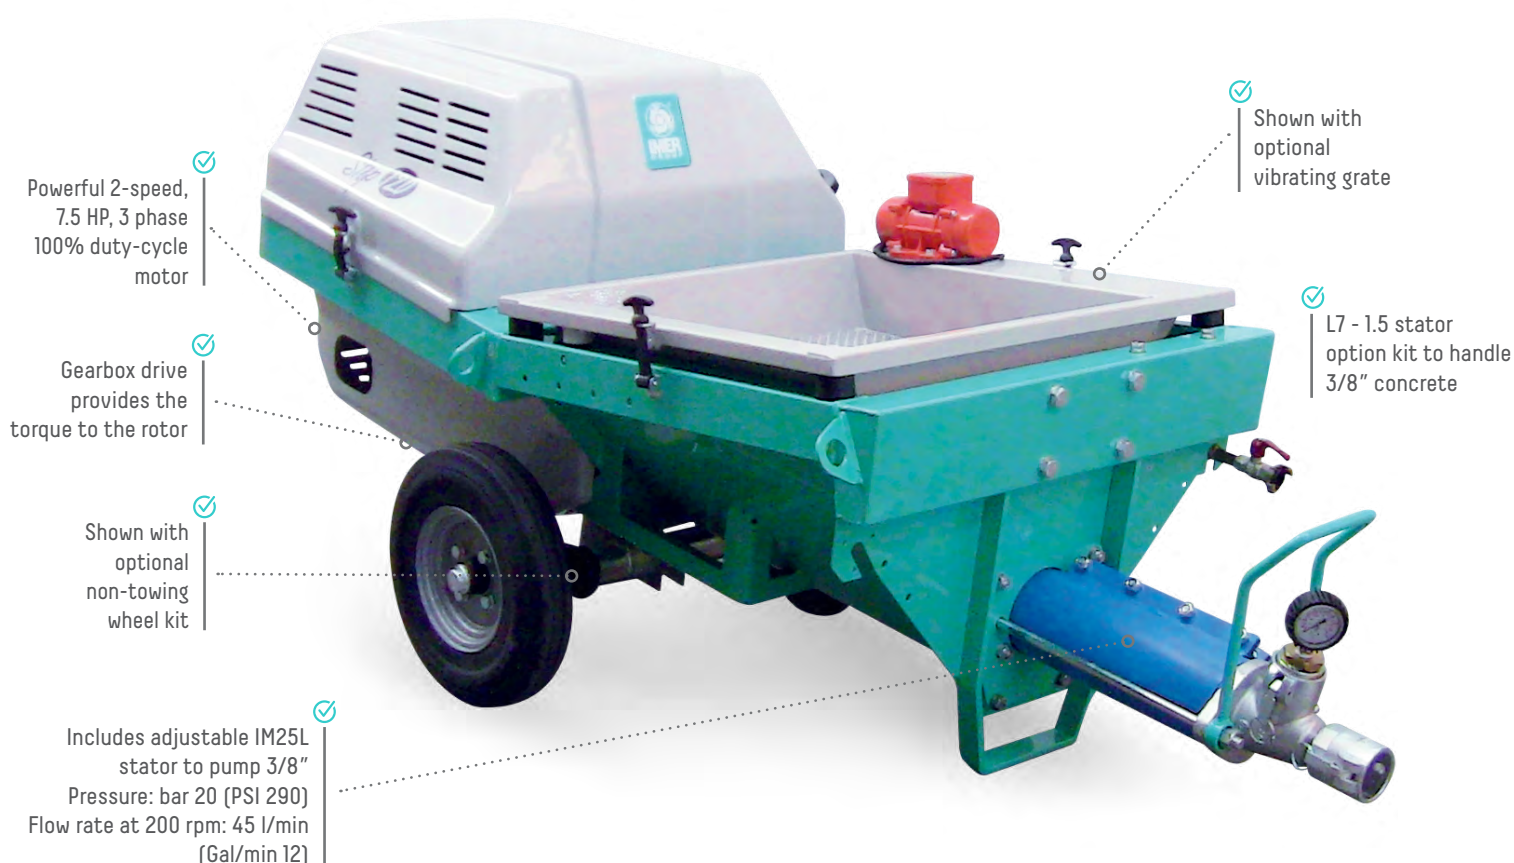

CONTROL PANEL 3 PHASE

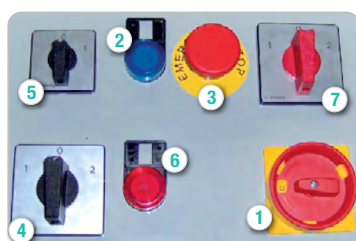












































































- 1 On/Off switch
- 2 Current supply light
- 3 Emergency stop button
- 4 Rotor/stator forward/reverse
- 5 Vibrating grate switch
- 6 Fault indicator light
- 7 Speed control switch

Technical specifications

STEP-UP 120 3P	
Motor power rate	7.5 hp
Mixer power rate	2 hp
Electric compressor	3 hp / 11 cfm
Max aggregate size	3/8 in
Maximum flow rate IM25L	2.75 cu yd
Maximum flow rate 60.12	6 cu yd
Maximum flow rate 2L6	2.35 cu yd
Horizontal pumping distance (*)	300 ft
Vertical pumping distance (*)	200 ft
Hopper capacity	4.25 cu ft
Dimensions	33 W x 80 L x 38 H in
Weight	616 lbs

(*) The pumping distance will vary depending upon the type of material being used.

		STEP-UP 120 APPLICATIONS				
	STANDARD ROTOR / STATOR IM25L Rotor Part # 1107111 IM25L Stator Part # 1107110	Pumping of grouts, self-leveling underlayments	Spraying fireproofing	Mortar and stucco setup	Shotcrete	Grouts with 3/8" aggregate
Product / Part #		A	B	C	D	E
	Spin 30 continuous mixer with iDust grate - Part # 1106152					
	Step-Up 120 pan mixer, 3 phase Part # 1107509 (requires part # 1107574)					
	120' Remote control Part # 1107574					
	Remote control extension cable Part # 1107544					
	Piston compressor, 3 phase Part # 1107585					
	53' x 13 mm Air hose w/Geka - Part # 1107532 33' x 25 mm Air hose w/Geka - Part # 1107531					
	2L6 Rotor/stator kit Part # 1107088					
	60.12 Rotor/stator kit Part # 1107090					
	Vibrating grate Part # 1107592					
	L7-1.5 Rotor/stator kit Part # 1107660					
	33' x 35 mm Material hose Part # 1107528					
	33' Material hose Ø 50 mm (2") w/cam couplings - Part # 1107533					
	50mm to 35 mm Material hose reducer Part # 1106178					
	Non-towing wheel kit Part # 1107633					
	Spray gun step 120 Part # 1107577					
	Shotcrete gun Part # 1106250					
	5' Overhead wand Part # 1107549					
	16' x 35 mm male to 25 mm male hose Part # 1107074					
	Pintle tow ring Part # 1107161					

✓ Required ✓ Optional

STANDARD EQUIPMENT 3 PHASE

- 2-Speed control panel
- IM25L rotor/stator
- 66' power cord
- 5 / 7.5 HP, 2 speed, 3 phase 100% duty-cycle motor
- Grate for premixed materials
- Tow kit
- Remote control ready
- Accessory toolbox

STEP-UP 120A


PROGRESSIVE CAVITY PUMP: SCREW PUMP FOR SELF-LEVELING AND GROUTS



STEP-UP 120A | Model # 1106054 | 220V/60Hz, 3 Phase

QUIETLY SPRAY AND PUMP LARGE VOLUMES

Best described as a pure high flow material pump for self-leveling materials and non-shrink grouts. Designed to provide 9.5 cubic yard per hour performance efficiently and quietly in restricted job site environments. Its sole mission is to pump large quantities of material through a unique high flow rotor/stator pumping system. Pump or spray mortars, stuccos, grouts, restoration mortars, underlayments, fireproofing, waterproofing, and many other materials.

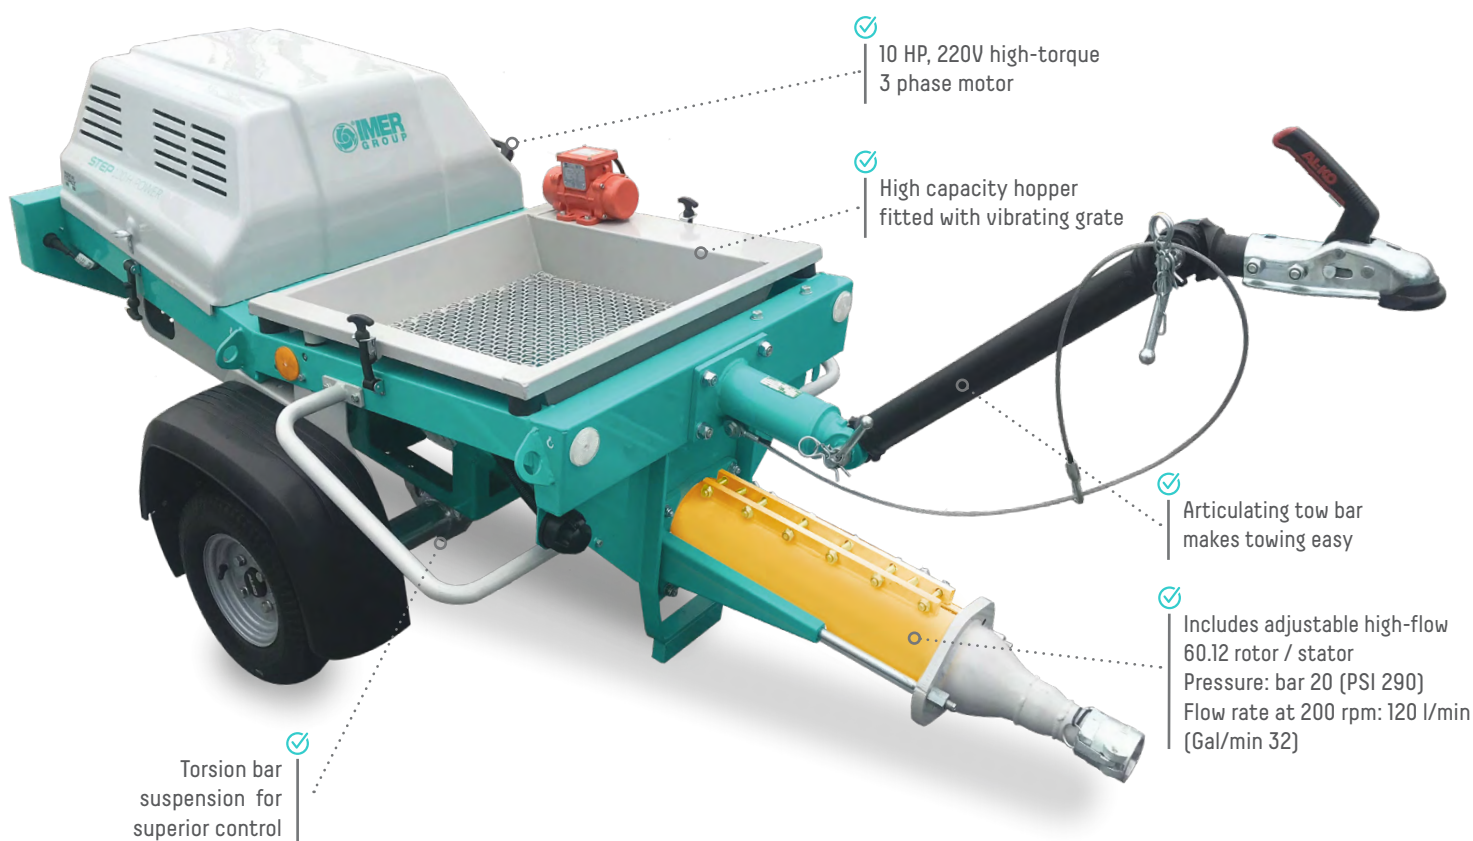

SHOTCRETE GUN

A low-cost alternative to piston pumps. Add a towable compressor to the gun and feed from a ready-mix truck.



OPTIONAL NON-TOWING KIT

Add the optional non-towing wheel kit with lifting handle for easy transport around the jobsite.















Technical specifications

	STEP-UP 120 A
Supply	220v/60Hz, 3 Phase
Motor power rate	10 hp
Max grain size	3/8 in
Flow rate	9.5 cu yds / hr
Max pumping distance	200 ft
Max pumping height	100 ft
Hopper capacity	4.25 cu ft
Dimensions	32 W x 91 L x 38 H in
Weight	616 lbs
Sound pressure level	< 79 dB (A)

(*) The pumping distance will vary depending upon the type of material being used.




STEP-UP 120 A APPLICATIONS			
 STANDARD ROTOR / STATOR 60.12 Rotor Part # 1107083 60.12 Stator Part # 1107081	Pumping of grouts, self-leveling underlayments	Shotcrete	Grouts with 3/8" aggregate
	A	B	C
 Non-towing wheel kit Part # 1107633	✓	✓	✓
 33' of Ø 35 mm Material hose Part # 1107528	✓		
 33' of Ø 50 mm Material hose Part # 1107533	✓	✓	✓
 Standard grate for premixed material Part # 1107569	✓	✓	✓
 50 mm to 35 mm material hose reducer Part # 1106178	✓		
 Shotcrete gun Part # 1106250		✓	
 Pintle tow ring Part # 1107161	✓	✓	✓
 2L6 Rotor/stator kit Part # 1107088	✓		
 IM25L Rotor/stator kit Part # 1107149	✓	✓	✓
 Mix 360 Mixers - Electric and Gas Models Part # 194585, 1194578, 1194574, , 11945745, , 1194576	✓	✓	✓
 Mix 750 Mixer - Electric and Gas Models Part # 194640, 194644, 194645, 194646, 194648	✓	✓	✓

✓ Required ✓ Optional

STANDARD EQUIPMENT **3 PHASE**

- Three-phase 220V/60Hz motor – 10 HP 100% duty-cycle motor
- Electric control panel
- 60.12 rotor/stator
- Built-in low voltage electric remote control with 120' of cable
- 133' power supply cord
- Vibrating grid
- Accessory box

CONTROL PANEL **THREE-PHASE**



- 1 On/Off switch
- 2 Current supply light
- 3 Emergency stop button
- 4 Rotor/stator forward/reverse
- 5 Vibrating grate switch
- 6 Safety default light

PRESTIGE 300


PROGRESSIVE CAVITY PUMP: 2-CYLINDER PISTON PUMP WITH "S" VALVE



PRESTIGE 300 | Model # 1106133 | 24 HP, Yanmar Diesel

A MASTERPIECE OF PUMP ENGINEERING IN A SMALL PACKAGE

The Prestige 300 is a diesel-powered multi-purpose pump and spray machine with a built-in 6.3 cubic foot hydraulic mixer and onboard compressor for spraying. The military spec control panel integrates all these functions in one location, allowing operators to quickly and easily learn to operate the pump. Known for its versatility, the Prestige is designed to use different rotor/stator combinations for pumping a wide range of materials - including up to 3/8" aggregate.

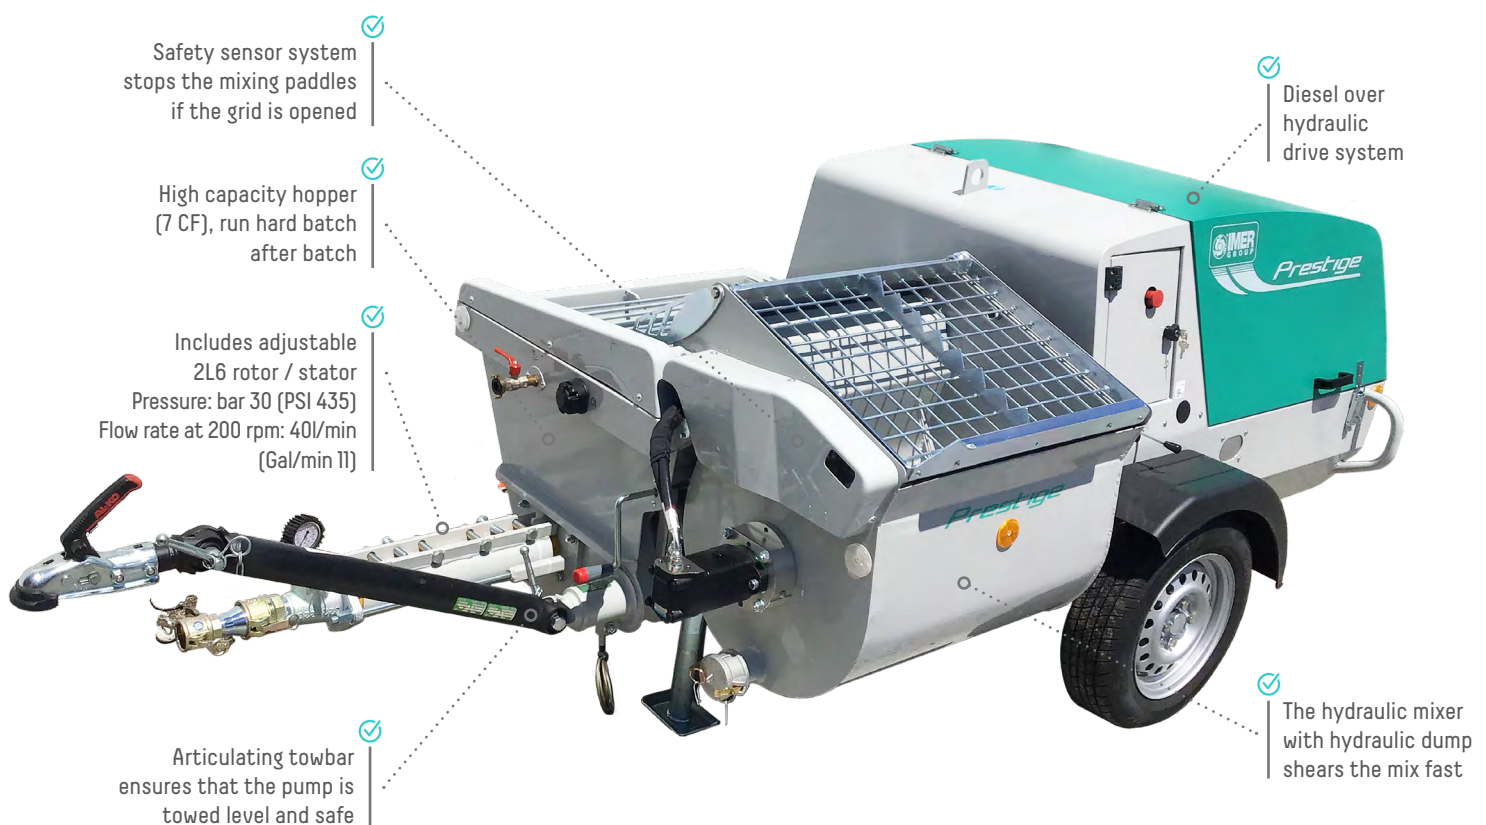

INNOVATIVE TECHNOLOGY

The ECO T Power has a "smart system" which adjusts the 24 HP diesel engine's RPMs according to power demands, saving power and money.

ANTI-VIBRATION CONTROL

Best in class control panel complete with pressure gauges and indicators.

OPTIONAL

Add the optional electronic water flow meter, to precisely measure your water to the mixer.

AGGRESSIVE & EFFICIENT

IMER's mixer paddles aggressively mix the material, this ensures a clump free mud in the shortest time possible.



Technical specifications

YANMAR

PRESTIGE 300


















Engine* - Diesel	Yanmar, 24 hp
Compressor flow rate	14 cf/m
Max pumpable aggregate size IM25L*	3/8 in
Variable flow rate 60.12*	6 yd / hr
Variable flow rate IM25L*	4 yd / hr
Variable flow rate 2L6*	3 yd / hr
Max pressure 2L6*	580 psi
Hopper capacity	7 cu ft
Mixer capacity	6.3 cu ft
Dimensions	131-1/2 W x 55-1/2 L x 53 H in
Weight	1,653 lbs

(*) Warning: Cancer and Reproductive Harm - <https://www.p65warnings.ca.gov>

(**) The max flow rate and the max pumping pressure cannot be performed at the same time.



PRESTIGE 300 APPLICATIONS

		PRESTIGE 300 APPLICATIONS				
		Pumping of grouts, self-leveling underlayments	Spraying fireproofing	Mortar and stucco setup	Shotcrete	3/8" aggregate
Product / Part #		A	B	C	D	E
	33' of Ø 35 mm hose Part # 1107528	✓	✓	✓		
	33' of Ø 50 mm hose Part # 1107533	✓	✓	✓	✓	✓
	Aqua Control Electronic Meter System Part # 1107209	✓	✓	✓		✓
	Vibrating grate Part # 1107036	✓		✓	✓	✓
	Four-function remote control w/ 164' cable Part # 1107086	✓	✓	✓	✓	✓
	IM25L Rotor/stator kit Part # 1107149	✓	✓	✓	✓	✓
	60.12 Rotor/stator kit Part # 1107090	✓	✓	✓	✓	
	L7 - 1.5 Rotor/Stator Kit (4" Heavy-Duty Connection, w/2" HD Reducer) Call for Part #				✓	✓
	50 mm to 35 mm material hose reducer Part # 1106178	✓	✓	✓		
	Spray gun 35 mm Part # 1107577		✓	✓		
	16' x 35 mm male to 25mm male hose Part # 1107074		✓	✓		
	Pintle tow ring Part # 1107161	✓	✓	✓	✓	✓
	Shotcrete gun Part # 1106250				✓	
	5 Function radio remote Part # 1107001	✓	✓	✓	✓	✓
	Hydraulic power washer Part # 1107208	✓	✓	✓	✓	✓
	5' Overhead wand Part # 1107549		✓	✓		
	53' x 13 mm Air hose w/Geka - Part # 1107532 33' x 25 mm Air hose w/Geka - Part # 1107531		✓	✓		

✓ Required ✓ Optional

STANDARD EQUIPMENT PRESTIGE 300

- 24 HP Yanmar diesel engine
- 14 CF/m compressor
- 2L6 adjustable rotor/stator
- High-shear hydraulic mixer
- Programmable mixer timer
- Metal accessory box
- 2 clean-out sponges
- Tow package highway use
- Variable speed electro-hydraulic controls

BOOSTER 20 BOOSTER 15

PISTON PUMP: 2-CYLINDER PISTON PUMP WITH "S" VALVE



BOOSTER 20 | Model # 1106126 | 28 HP Piston Pump

COMPACT TOWABLE HIGH-PERFORMANCE DIESEL CONCRETE PISTON PUMP

Although it has high-performance output, the compact design of the Booster 20 allows it to function on job sites with limited space - where no other pumps of its capability could fit. This pump is designed and built to provide up to 20 cubic yards per hour of concrete, shotcrete, and high strength grouts.



CONTROL PANEL
























Stainless steel control panel complete with LED indicators and hydraulic gauges

Technical specifications **YANMAR**

BOOSTER 20	
Engine* - Diesel	3-cylinder Yanmar 3TNV80F-SMIMI
Installed power rate	28 hp
Pumping system	2-cylinder with hydraulic control
Max aggregate size	1 in
Flow rate (**)	3 - 20 cu yd / hr
Pumping pressure (*)	1,000 psi
Pipe outlet	Heavy Duty 4 in
Hopper capacity	7 cu ft
Loading height	42-½ in
Width	58 in
Length	161 in
Height	60 in
Weight	3,100 lbs

(*) Warning: Cancer and Reproductive Harm - <https://www.p65warnings.ca.gov>

(**) The max flow rate and the max pumping pressure cannot be performed at the same time.


BOOSTER 20 APPLICATIONS			
			
	Pumping of 3/4" concrete	Shotcrete	Grout or Self Consolidating Concrete (SCC) 3/8"
Product / Part #	A	B	C
 Hydraulic power washer Part # 1107171			
 5 Function radio remote Part # 1107001			
 Four-function remote control w/ 164' cable Part # 1107086			
 Rubber hopper extension kit (13 cu ft) Part # 1107196			
 Steel hopper extension kit (17 cu ft) Part # 1107197			

 Required  Optional

STANDARD EQUIPMENT BOOSTER 20

- 3-cylinder liquid-cooled diesel engine, YANMAR
- Automatic greasing system
- Concrete hopper with agitator
- Vibrating grid, 12V
- Hydraulic system with reverse
- Pumping unit with S-valve - automatic compensation of clearance and wear
- 4" Heavy-duty delivery manifold
- Full-featured electric control panel
- Piston head installation and extraction tool kit
- Complete w/heavy-duty highway tow package
- Accessory box with grease pump
- Centralized grease ports
- 4" Cleaning balls
- Surge brakes
- Wheel chocks
- Parking brake

COMBICUT & MASONRY SAWS



TILE, STONE, BRICK, BLOCK, SLAB SAWS & BLADES

Overhead Rail Saws Stone & Slab Saws

When you need a saw that can handle it all, look no further than IMER's Combicut and Masonry series of saws. Made to be accurate, powerful and light, and comfortable in any environment, Combicut saws are used in fabrication shops to outdoor patio construction sites, small and large tile installations.

Stone and slabs keep getting bigger and bigger. High horsepower and a sturdy frame allow the Combicut series to make the cuts that other saws could only dream of. Use for precast, stone, ceramic, porcelain, brick and pavers.

The Masonry Series saws were designed for cutting bricks, blocks, and stones. Use the Masonry series for cutting of larger, bulkier materials when you need depth of cut.





COMBICUT 200 VA

TILE STONE AND PORCELAIN SAWS



NOISE LEVEL
<78 DB

COMBICUT 200 VA

Model # 1188084

110V/60Hz, 1.75 HP

ACCURATE, LIGHTWEIGHT RAIL SAW

Easy to use and built to last. The perfect solution for rental stores as the Combi 200VA is equally at home in the hands of the professional installer, contractor or the Do-It-Yourselfer.

Water valve
to control
water mist

8" continuous
rim porcelain
blade included

Complete with
high flow
water pump

Included side
table for extra
work space

Included
protractor
up to 180°

ONLY
48 lbs

High impact
removable poly
water pan with
baffles

PLUNGE CUTS

Plunge cuts are smooth and precise as the cast aluminum cutting head pivots on a sealed bushing. "L" cuts for door jams are now quick n' simple.



ACCURATE ANGLED CUTS

When 45 degree cuts are needed, just tilt the travel beam. Simple and accurate. While the overhead beam design provides a smooth accurate cut.



STAND INCLUDED



INNOVATION

The cast aluminum protractor is the only truly accurate rip guide in the industry.



TILE CLAMP FOR ACCURACY

The tile clamping system is an accessory that attaches to all Combicut Series saws. Clamp down tiles and use the overhead laser to guarantee a smooth, thorough, and accurate cut. Item # 1188157



CAST ALUMINUM

The cast aluminum construction of the Combicut VA's frame structure ensures a rigid, yet light weight saw. Out of the box it can cut tile or stone to within 1/32"

36

COMBICUT 250 VA

COMBICUT 250 VA

Model # 1188164

110V/60Hz, 1.75 HP



NOISE LEVEL
<78 DB

ACCURATE, CHIP-FREE CUTTING PERFORMANCE

A small portable tile saw with a lot of power. Compact, lightweight, and user-friendly, it is ideal for installers and DIY projects. It offers high cutting capacity: the blade is suitable for all types of material - ideal for cutting ceramic, stone materials, bricks and stone.



**ONLY
72 lbs**

Technical specifications

	COMBI 200VA 8"	COMBI 250VA 10"
Blade diameter	8 in	10 in
Blade shaft diameter	5/8 in	5/8 in
Max. cutting length (w/plunge cut)	21 (24) in	28 (31) in
Max. cutting depth	2-3/4 in	3-3/4 in
Motor rating	1.75 hp 110v, 15 amp	1.75 hp 110v, 15 amp
Blade speed	2800 rpm	2800 rpm
Weight (boxed, includes stand)	48 (68) lbs	72 (85) lbs
Water pan capacity	5 gal	10 gal
Water pump flow	3 gpm	3 gpm
Length* (boxed)	35 (37) in	40 (43) in
Height* (boxed)	19 (22) in	22 (24) in
Width* (boxed)	18 (20) in	18 (21) in
● Replacement Blade - Continuous Rim	#1193920	#1193922
● Replacement Blade - Abrasive Masonry	n/a	#1193932
● Replacement Blade - Concrete Turbo	n/a	#1193942

(*) Operating Dimensions (boxed)

PERFORMANCE

To ensure that the Combi 200VA and 250VA would be both light and powerful, we designed and developed an all new 1.75 HP motor. Cuts are made quickly and quietly. Performance and reliability are guaranteed.

EQUIPPED WITH A LASER GUIDE

A laser cutting guide comes standard with every CombiCut 250VA. Mark the line of your cut on the material, line it up with the laser, and go.



COMBICUT 250 / 1000 & 1500

TILE STONE AND PORCELAIN SAWS



NOISE LEVEL
<78 DB

COMBICUT 250/1000 VA

Model # 1188174

110V/60Hz, 1.75 HP

COMBICUT 250/1500 VA

Model # 1188180

110V/60Hz, 1.75 HP

SAWS DESIGNED FOR LARGER TILE AND STONE

Precision cast aluminum, high-tech engineering, and manufacturing. IMER has created a saw which delivers superior accuracy, is lightweight, durable, and extremely reliable. Perfect for those jobs which are smaller in nature yet require cuts up to 60" in length.



PLUNGE CUTS

Plunge cuts are smooth and precise as the cast aluminum cutting head pivots on a sealed bushing. "L" cuts for door jams are now quick n' simple.



ACCURATE 45° CUTS

When 45 degree cuts are needed, just tilt the travel beam. The overhead beam design provides a smooth accurate cut. Simple and accurate.



HIGH TORQUE, LOW RPM

The 110V motor on the Combi 250VA was designed specifically for this saw. High torque at a low rpm delivers fast, chip-free cutting performance.

Our heavy-duty motors are designed to perform all day providing consistent power on each start and cut.

INNOVATION

The cast aluminum protractor is the only truly accurate rip guide in the industry.




TILE CLAMP FOR ACCURACY

The tile clamping system is an accessory that attaches to all Combi Series saws. Clamp down tiles and use the overhead laser to guarantee a smooth, thorough, and accurate cut. Item # 1188157



SIDE TABLE INCLUDED

The side table supports large format tiles.



38

COMBICUT 350 iPOWER

TILE STONE AND PORCELAIN SAWS

COMBICUT 350 iPOWER | Model # 1188931 | 220V/60Hz 4 HP, Single-Phase



NOISE LEVEL
<75 DB

TILE, STONE & MASONRY SAW FOR PRECISE, LENGTHY CUTS

The 4 HP high-torque motor in the Combicut 350 iPower ensures that cuts are made quickly and accurately. Tile and stone installers, masons, precast fabricators, landscapers, and general contractors worldwide put the Combicut 350 iPower to the test every day.



Technical specifications

	250/1000 VA	250/1500 VA	350 iPOWER
Blade diameter	10 in	10 in	14 in
Blade shaft diameter	5/8 in	5/8 in	1 in
Max. cutting length (w/plunge cut)	37 (40) in	57 (60) in	41-1/2 (47-1/4) in
Max. cutting depth	3-3/4 in	3-3/4 in	4-3/4 in / 2-1/4 in
Motor rating	1.75 hp 110v, 15 amp	1.75 hp 110v, 15 amp	4 hp 220v, 15 amp
Blade speed	2800 rpm	2800 rpm	2800 rpm
Weight (boxed, includes stand)	82 (98) lbs	125 (150) lbs	265 (300) lbs
Water pan capacity	12 gal.	13 gal.	9 gal.
Water pump flow	3 gpm	3 gpm	--
Length* (boxed)	55 (58) in	76 (77) in	69 (70) in
Height* (boxed)	24 (26) in	24 (26) in	55-1/2 (60-1/2) in
Width* (boxed)	25 (27) in	25 (27) in	30 (30-1/2) in
● Replacement Blade - Continuous Rim	#1193922	#1193922	#1193924
● Replacement Blade - Abrasive Masonry	#1193932	#1193932	#1193934
● Replacement Blade - Concrete Turbo	#1193942	#1193942	#1193944
● Replacement Blade - Stone	n/a	n/a	#1193954

(*) Operating Dimensions (boxed)

POWER

The motor in the COMBI 350 iPOWER is a high-torque 4 hp 220V Single-Phase stone and paver eating machine. All this power goes from the motor to the blade via a high tech serpentine belt. No adjustment or maintenance required, it is a tough and reliable design.



MASONRY 350 SMART

BRICK AND BLOCK SAW



NOISE LEVEL
<78 DB

MASONRY 350 | Model # 1188975 | 115V/60Hz, 2 HP

THE BEST SOLUTION FOR CUTTING BRICKS, BLOCKS, PAVING STONES, OR TILE

The biggest cutting table available on a 14" masonry saw. The Masonry 350 delivers very accurate cuts up to 30" in length and 4 3/4" deep. The 2 HP motor provides the power required to cut through larger and longer pieces day in and day out.



Technical specifications

MASONRY 350 SMART CUT

Blade diameter	14 in
Blade shaft diameter	1 in
Max. cutting length - includes plunge	26 (30 in)
Max. cutting depth	4-3/4 in
Motor	2 hp 115v, 15 amps
Cutting table dimensions	20 in x 16 in
Cutting surface height	33-1/2 in
Motor speed	2850 rpm
Weight* (boxed)	175 (215) lbs
Water pan capacity	10 gal
Water pump flow	3 gpm
Length* (boxed)	47 (48) in
Height* (boxed)	51 (55) in
Width* (boxed)	28-1/2 (29) in
● Replacement Blade - Continuous Rim	#1193924
● Replacement Blade - Abrasive Masonry	#1193934
● Replacement Blade - Concrete Turbo	#1193944
● Replacement Blade - Stone	#1193954

INNOVATION


The blade guard is lined with sound absorbing material used in the boat building industry, and this greatly reduces noise from the blade. The blade guard may be removed with just two thumb screws - changing blades is fast and easy.



MITER CUT ACCESSORIES

If your work requires you to make 45 degree miter cuts, we have developed an accurate and easy-to-use miter for the Masonry 350 and Masonry 750 saws.

Masonry 350, Item # 1187640
Masonry 750, Item # 1188870



(*) Operating Dimensions (boxed)

MASONRY 750 PLUS

BLOCK, STONE AND PRECAST SAW

MASONRY 750 | Model # 1188863 | 220V/60Hz, 5.5 HP, Single-Phase
MASONRY 750 | Model # 1188864 | 220V/60Hz, 7.5 HP, 3 Phase



THE ERGONOMIC 30" BLADE STONE SAW HANDLES BIG BLOCK AND STONE

The Masonry 750 Plus allows operators to cut 8" and 10" blocks in a single pass – without the added hassle and effort of a foot pedal. The powerful 7.5 hp electric motor combined with the 30" blade delivers 12" of cutting depth.

Cut through blocks, pavers, and pre-cast concrete products with ease.

The frame and cutting tray are hand fabricated using heavy-duty steel, while the ergonomic design allows the operator to transport the saw with little effort.



Technical specifications

MASONRY 750 PLUS	
Blade diameter	30 in
Blade shaft diameter	1 in
Max. cutting length - includes the plunge	18 / 27 in
Motor rating	5.5 hp 220v, 1ø or 7.5. hp 220v, 3ø
Blade speed	1700 rpm
Weight (crated)	440 (495) lbs
Water pan capacity	9 gals
Self-priming centrifugal pump	3 g.p.m.
Length* (boxed)	61 in
Height* (boxed)	63 in
Width* (boxed)	33-½ in
● Replacement Blade - Masonry Block	#1193957

(*) Operating Dimensions (boxed)

VERSATILITY

Should it be necessary to make a plunge cut just grab the tilt handle and ease the blade into the material. The cutting head pivots on sealed bearings, making plunge cuts is smooth and controlled.

EASE OF USE

The Masonry 750 is designed to make it easier to move the blocks on and off the saw. The lower profile allows the operators to get a lot more done in a day.

QUALITY

The box steel frame is very rigid yet light for a saw of this size. Proven design techniques combined with high-quality steel makes for one powerful machine.



POWER

The 30" blade begins to spin very efficiently as the optional 7.5HP motor is equipped with an electronic soft start system.

PORTABILITY

The wheelkit and the well engineered balance of the saw allow it to be rolled around by one person. Easily handled by a forklift as lift slots are welded into a frame.

SAW BLADES & ACCESSORIES

TILE, STONE, MASONRY, AND HARD MATERIAL



IMER SAW - REPLACEMENT SAW BLADES

IMER STANDARD AND PREMIUM SAWBLADES PROVIDE ACCURATE, CHIP-FREE CUTTING PERFORMANCE

From thick stone and block to large ceramic tile, porcelain and stone pieces, IMER saw blades are designed exclusively for IMER saws — only using the highest-quality diamonds, metals and aggregates to provide accurate, professional-grade cuts again and again. The preferred saws and blades of masons, tile professionals, and rental companies worldwide.




CONTINUOUS RIM TILE BLADES

SIZES: 8" | 10" | 14"

IMER's continuous rim blades are designed to cut Ceramic tile, Porcelain and Stone. Continuous rim blades are best for accurate, chip-free cutting performance, essential for cosmetic appearance.

PART #	BLADE
1193920	8" x .060 Continuous Rim Porcelain & Hard Materials
1193922	10" x .060 Continuous Rim Porcelain & Hard Materials
1193924	14" x .090 Continuous Rim Porcelain & Hard Materials

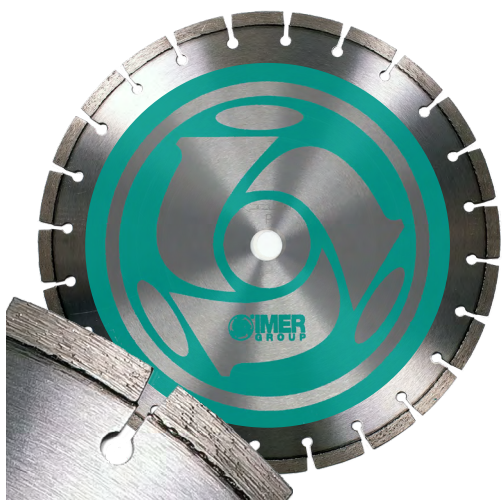


SEGMENTED PREMIUM MASONRY BLADES

SIZES: 10" | 14" | 20" | 30"

IMER's premium segmented blades are designed specifically for abrasive masonry applications such as Block, Brick, Sandstone, and Soft Stone.

PART #	BLADE
1193932	10" x .110 Segmented Premium Masonry
1193934	14" x .125 Segmented Premium Masonry
1193938	20" x .155 Segmented Premium Masonry*
1193913	30" x .165 Full Segmented Premium Masonry
1193957	30" x .165 Segmented Premium Masonry

*Conversion kit required

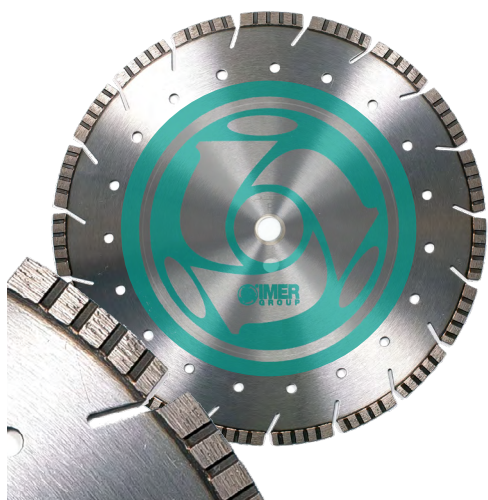

CONCRETE TURBO BLADES

SIZES: 10" | 14" | 20"

IMER's hard masonry turbo blades are designed to handle a multitude of applications starting with Concrete, Block, Brick, Paver Brick, Hard Brick, Masonry, Natural Stone, Refractory Material, Artificial Stone, Sandstone, Soft Stone, Stone.


PART # BLADE

1193942 10" x .110 Concrete Turbo with Teardrop Gullets

1193944 14" x .125 Concrete Turbo with Gullets

1193948 20" x .160 Concrete Turbo with Teardrop Gullets*

**Conversion kit required*

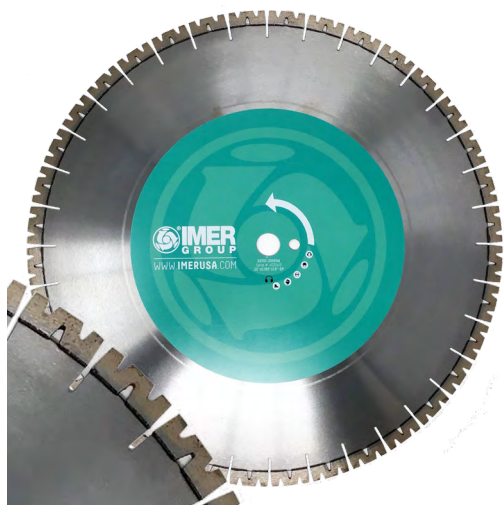

STONE / HARD APPLICATION PREMIUM BLADES

SIZES: 14" | 20" | 30"

IMER's premium diamond blades are built to tackle Block, Brick, Paver Brick, Hard Brick, Masonry, Natural Stone, Refractory Material, Artificial Stone, Sandstone, Soft Stone, Stone. The silent core on the 14" reduces noise.

PART # BLADE


1193954 14" x .125 Silent Core for Stone

1193956 20" x .165 Stone Cutting Blade*

1193958 30" x .165 Stone Cutting Blade

1193941 30" x .170 Premium Stone Cutting Blade

**Conversion kit required*

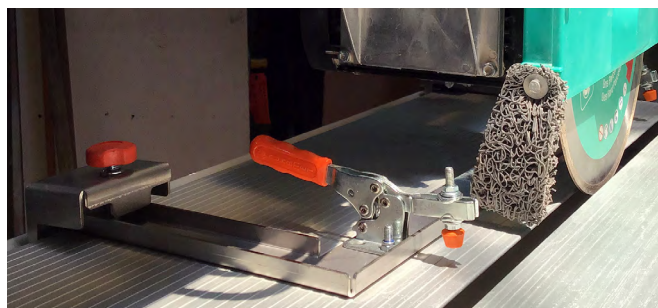

TILE CLAMP FOR ACCURACY

The tile clamping system is an accessory that attaches to all Combicut Series saws. Clamp down tiles and use the overhead laser to guarantee a smooth, thorough, and accurate cut. Item # 1188157

CARRY DUMPERS



GAS & ELECTRIC POWERED TRACKED TRANSPORTERS

KATO-IMER's Track Driven Powered Mini-dumpers and Buggies are the ideal solutions to transport and handle various types of materials and provide excellent traction on grades, inclines, and soft soils. Gas and Diesel powered options are designed to tackle larger outdoor projects. The award-winning electric mini-dumper is perfect for indoor situations when fumes and noise need to be considered or are mandatory.

From mini-dumpers to lift and haul smaller materials to larger buggies with a 180-degree pivoting dump, the family of versatile machines can be equipped with a wide range of accessories, which may be easily changed by the quick and simple equipment coupling/uncoupling system.

Each machine is designed with the comfort and safety of the operator in mind. Added safety features and ergonomic designs help the operator be more productive and stay safe throughout the workday. When an operator stops, even in a state of idling, the machine stops.

The control consoles on each machine are simple and intuitive, and a control lever protection bar is a convenient armrest for the operator, while the control levers are connected directly to the control valve to ensure an accurate, progressive response.

Each day, KATO-IMER engineers are working to develop new models and attachments to make work easier, and safer.



KATO IMER
THINK GLOBAL, ACT LOCAL



CARRY 105

GAS POWERED TRACKED MINI-DUMPER



CAPACITY
8 CU FT

CARRY 105 GAS - TIPPING BUCKET

Model # 5222310001HD

8 HP Honda GX

LOAD N' GO SMALL, VERSATILE MACHINE

The new Carry 105 mini-dumper is a highly agile and versatile machine, small in size, yet able to handle a large load on all kinds of terrain, including steep gradients. The Carry 105 Gas and Electric standard models include a steel Tipping Bucket. The Carry 105 mini-dumpers may be equipped with a wide range of accessories to meet various requirements, including the Self-loading Shovel, or the Dumping Platform Bed with Opening Sides.



SAFETY AND STANDARDS

The Honda engine is low noise, which meets established noise pollution standards. The engine is mounted on vibration dampers to significantly reduce the amount of vibration transmitted.



OPTIONAL DUMP PLATFORM WITH OPENING SIDES

Model # 5180301002HD

The dump platform accessory is perfect for transporting and unloading bulky materials from 3 sides of the platform bed.



Technical specifications

POWERED by
HONDA

CARRY 105

Engine*	Honda GX200, 6.5 hp
Machine weight	640 lbs
Operating load	1,102 lbs
Payload capacity	8 cu ft
Speed	2 mph
Max allowed slope when empty	20° - 36%
Max allowed slope when loaded**	11° - 20%***
Ground clearance	4 in
Start	Electric
Length	62-½ in
Height	44-½ in
Width	27 in

(*) Warning: Cancer and Reproductive Harm - <https://www.p65warnings.ca.gov>

(**) Guide with operator on the ground, where applicable (***) Variable based on the configuration

CARRY 105 ELECTRIC

ELECTRIC POWERED TRACKED MINI-DUMPER

CARRY 105 E - TIPPING BUCKET | Model # 5222210001HD | Electric



ECOLOGICAL WITHOUT COMPROMISE

The electric power Carry 105 mini-dumper is the ideal solution to satisfy the requirements of handling materials in closed spaces and indoor job sites, and sensitive places such as schools, hospitals and in rooms with little ventilation, where it is essential to work without gases, fumes or noise.



**INTERMAT
INNOVATION
AWARD
WINNER**



Technical specifications

CARRY 105E	
Engine / Motor	Electric
Power	2.95 hp
Batteries	Lithium-Iron-Phosphate (Li-Fe-P04) 90 Ah 36V rated batteries
Battery life (continuous operation)	2.5 hrs
Operating load	882 lbs
Payload capacity	7.77 cu ft
Speed	2 mph
Basic machine weight	716 lbs
Payload weight	110 lbs
Bucket weight with shovel	231 lbs
Bed weight	143.3 lbs
Max allowed slope when loaded*	11° - 20%**

(*) Guide with operator on the ground, where applicable (**) Variable based on the configuration

SIMPLE, INTUITIVE CONTROLS

The control console is simple and intuitive. The control lever protection bar is a convenient armrest for the operator, while the control levers are connected directly to the control valve to ensure an accurate, progressive response.



SELF-LOADING SHOVEL

Model # 5180301001HD

The self-loading shovel makes job site cleanup and moving gravel, stone, and mulch easier and more cost-effective.

HIGH EFFICIENCY

The machine automatically goes into stand-by when not running, providing high power with long service life. Its wear-resistant construction and modular design makes maintenance quick and easy.

CARRY 107

GAS POWERED TRACKED MINI-DUMPER



CAPACITY
11.6 CU FT

CARRY 107 - TIPPING BUCKET

Model # 5221110001

11 HP Honda GX

A COMPACT, YET POWERFUL TRACKED DUMPER BOASTS A 11HP HONDA ENGINE WITH AN EASY ELECTRIC START

The Carry 107 mini-dumper is the ultimate 1-person ride-on hauler. Designed with a compact 30" width to fit through the narrowest of backyard gates or interior doors. While conventional buggies and tracked machines do not offer an extendible undercarriage, the rubber tracks on the Carry 107 can extend from 30" to nearly 42" in width to provide the added stability required on challenging job sites with hills and uneven slopes, plus the extended track provides added protection to lawns and floors preventing unwanted damage.



30"
Width

42" Extendible Undercarriage

Intuitive controls with reduced vibration for operator comfort

Hydraulic power take-off provides added power for speed and inclines

Ergonomically designed footplate structure prevents vibration to operator

Narrow 30" width to fit through standard doors and gates



Steel 11.6 cubic foot bucket and 1,543 lb operating load

Change attachments easily with the "quick coupling" system

SAFETY AND STANDARDS

The Honda engine is low noise, which meets established noise pollution standards. The engine is mounted on vibration dampers to significantly reduce the amount of vibration transmitted.



EASY TO USE CONTROLS

Uncluttered, convenient, and intuitive controls allow for easy 1 person operation. The surrounding grab bars provide the operator added safety when driving and a convenient armrest when idling.



Technical specifications

POWERED by
HONDA

CARRY 107

Engine*	Honda GX390, 11 hp
Machine weight 107 / 107 HT	950 lbs / 1510 lbs
Operating load	1543 lbs
Payload capacity	11.6 cu ft
Speed	2.5 mph
Max allowed slope when empty	15° - 26%
Max allowed slope when loaded**	7° - 12%***
Ground clearance	4 in
Start	Electric
Length	72 in
Height	44-½ in
Width	30 in

(*) Warning: Cancer and Reproductive Harm - <https://www.p65warnings.ca.gov>

(**) Guide with operator on the ground, where applicable (***) Variable based on the configuration

CARRY 107 ATTACHMENTS

CARRY 107 - GAS POWERED HI-TIP TRACKED MINI-DUMPER AND MORE


SELF-LOADING SHOVEL
DUMP PLATFORM WITH OPENING SIDES
CONCRETE MIXER L 250 KIT AND SELF-LOADING SHOVEL
LEVELLING BLADE KIT
HIGH TIP BUCKET & SELF-LOADING SHOVEL KIT

Model # 5180101010HD
Model # 5180101012HD
Model # 5180102012HD
Model # 5180100029HD
Model # 5180101602HD



ACCESSORY KITS PROVIDE ADDED VERSATILITY AND ROI

The Carry 107 mini-dumper offers a full range of attachments that handle every aspect of material handling and multiple applications. Easily convert one machine into six different machines - including a Self-loading Shovel, Dump Platform, Concrete Mixer with Self-loading Shovel, Levelling Blade, and the Hi-Tip Bucket and Self-loading Shovel kit.

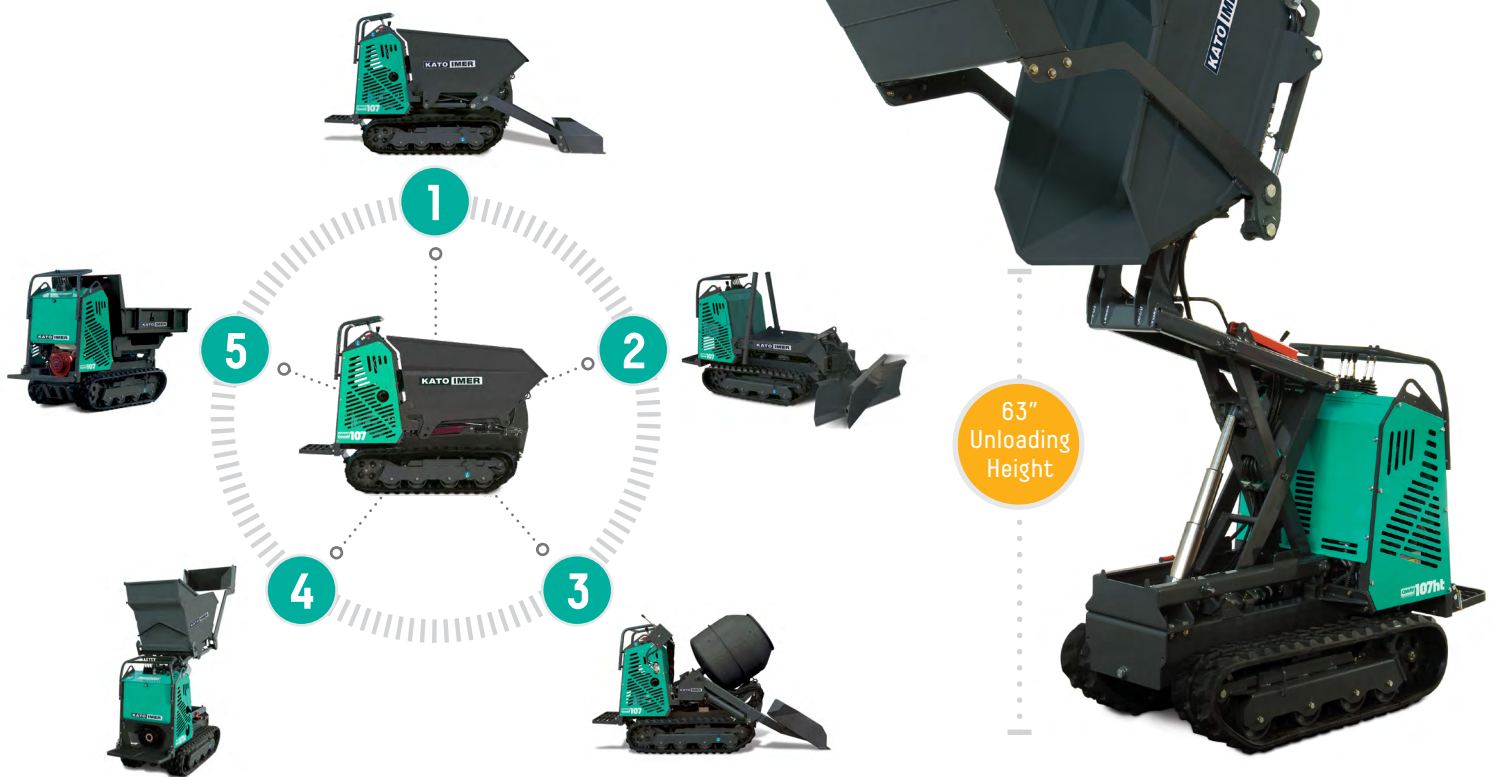

1

SELF-LOADING SHOVEL

Model # 5180101010HD

Attach the hydraulic-powered self-loading shovel to easily scoop, move, and drop multiple materials like stone, gravel, mulch, and dirt, not to mention job site cleanup.

2

LEVELLING BLADE

Model # 5180100029HD

Once you are finished moving material, the levelling blade is the perfect solution for levelling gravel, and stone for driveways, walkways and patios. The swiveling blade makes a great tool for pushing snow off parking lots and walkways.

3

CONCRETE MIXER WITH SELF-LOADING SHOVEL

Model # 5180102012HD

The concrete mixer and hydraulic-powered self-loading shovel are a unique solution for mixing and pouring concrete in hard-to-reach areas. Use the shovel to load dry material into the mixer, or use it to gently place wet material.

4

HI-TIP BUCKET WITH SELF-LOADING SHOVEL

Model # 5180101602HD

The "Hi-Tip" attachment hydraulically lifts materials in the steel 11.6 cubic foot bucket to an unloading/loading height of 63". The kit includes the self-loading shovel.

5

DUMP PLATFORM

Model # 5180101012HD

The three folding sides on the dump platform presents multiple possibilities for moving everything from logs and large rocks to drywall and lumber.

49

CARRY 108HF

GAS POWERED TRACKED MINI-DUMPER



CAPACITY
13 CU FT

CARRY 108 HF - TIPPING BUCKET & SELF-LOADING SHOVEL

Model # 5223213101

11 HP Honda GX



HIGH FLOW MEANS HIGH-PERFORMANCE, POWERFUL, AND FUNCTIONAL

The Carry 108HF high performance mini-dumper is a powerful, yet compact machine, engineered with four pumps to provide a high oil flow rate to increase speed, and to drive attachments that require increased power for heavier projects, such as brush-cutting and snow removal. The Carry 108HF coupling/uncoupling system makes changing attachments quick and simple. While the tracks supply power and stability on the ground, the float function prevents attachments from bouncing, providing additional stability and safety for the operator, especially on uneven or sloping terrains. The standard Carry 108HF unit includes the tipping bucket and self-loading shovel (shown right).

Easy to use
coupling/uncoupling
system

Float Control design
reduces bouncing
for added safety



BRUSH-CUTTING ATTACHMENT

Model # 5180104300

The powerful Carry 108 High Performance tracked machine with the brush-cutting attachment is ideal for mowing river banks, road verges, and shredding brush.



SNOW BLOWER ATTACHMENT

Model # 5180104700

The snow blower attachment is designed to easily remove snow from roads, paths, pavements, industrial sites, and more. The machine's tracks provide the power to plow through heavy snow and the adjustable blower provides options for snow placement.



Technical specifications

POWERED by
HONDA

CARRY 108HF	
Engine*	Honda GX390, 11 hp
Machine weight	1,329 lbs
Operating load	1,764 lbs
Payload capacity	13 cu ft
Speed	3 mph
Max allowed slope when empty	20° - 30%
Max allowed slope when loaded**	7° - 12%***
Ground clearance	3 in
Start	Electric
Length	72 in
Height	106 in
Width	30 in

(*) Warning: Cancer and Reproductive Harm - <https://www.p65warnings.ca.gov>

(**) Guide with operator on the ground, where applicable (***) Variable based on the configuration

CARRY 150

DIESEL POWERED 180° SWIVEL TRACKED DUMPER

CARRY 150 - 180° SWIVELLING BUCKET

Model # 5240304101

20HP Kubota Diesel



CAPACITY
28 CU FT

POWER, SPEED AND 180° SWIVEL DUMP

The Carry 150 has an independent dual circuit hydrostatic transmission with a variable displacement axial piston pump and a dual displacement axial piston hydraulic engine for each track. The standard Carry 150 model offers a 180° trilateral hydraulic lift and swivel bucket to handle a multitude of loading/unloading options.



Technical specifications

Kubota

CARRY 150

Engine* - Diesel	Kubota D902, 20 hp
Machine weight	1,896 lbs
Operating load	3,307 lbs
Payload capacity	28 cu ft
Speed	5 mph
Max allowed slope when empty	32° - 62%
Max allowed slope when loaded**	32° - 62%***
Ground clearance	9-1/2 in
Start	Electric
Length	107 in
Height	93-3/4 in
Width	42-1/2 in

(*) Warning: Cancer and Reproductive Harm - <https://www.p65warnings.ca.gov>

(**) Guide with operator on the ground, where applicable (***) Variable based on the configuration

INTUITIVE CONTROLS

The control panel is easy to access and operate. Drive and operate the Carry 150 from the protected operator's seat located behind the swivelling bucket.



HI-TIP SELF-LOADING SHOVEL AND BUCKET KIT OPTION

Model # 5250315101

The Carry 150 offers a "Hi-Tip" Tipping Bucket & Self-loading Shovel kit. The variable height scissor lifting bucket can lift and dump materials up to 75".

51

CARRY 230

DIESEL POWERED ALL-TERRAIN 180° SWIVEL TRACKED CRAWLER



CAPACITY
41.3 CU FT

CARRY 230 - 180° SWIVELLING BUCKET

Model # 5240334101HD

24.8HP Kubota Diesel

THE LARGEST BUCKET IN THE FLEET BOASTING 180° CAPABILITY

The Carry 230 tracked dumper is the most powerful machine in the IMER fleet. With a 24.8 HP Kubota Diesel engine, hydraulic transmission, 10-1/2" wide tracks, and a 41 cubic foot steel bucket, the Carry 230 is built to move and unload a multitude of material like concrete and stone quickly and efficiently.



EASY TO USE CONTROLS

Uncluttered, convenient and intuitive controls allow for easy 1 person operation. Ergonomic seating and control design provides added operator comfort.



SELF-LOADING SHOVEL AND BUCKET KIT OPTION

Model # 5240335101HD

The Carry 230 Trilateral Tipping Bucket & Self-loading Shovel kit scoops and dumps from multiple positions.



Technical specifications

Kubota

CARRY 230

Engine* - Diesel	Kubota V1505, 24.8 hp
Operating weight	5,038 lbs
Operating load	5,070 lbs
Payload capacity	41.3 cu ft
Speed	5 mph
Max allowed slope when empty	25° - 46%
Max allowed slope when loaded**	21° - 38%***
Ground clearance	9-3/4 in
Start	Electric
Length	127-1/4 in
Height	99-3/4 in
Width	51 in

(*) Warning: Cancer and Reproductive Harm - <https://www.p65warnings.ca.gov>

(**) Guide with operator on the ground, where applicable (***) Variable based on the configuration

52

EZEE CLEAN

MORTAR AND CONCRETE EQUIPMENT & TOOL CLEANER

EZEE CLEAN

Model # L000014
Case (12 - 22oz Bottles)

Model # L000013
5 Gallon Container



BEST VALUE
5 GALLON



CONCRETE CLEAN UP MADE EASY

EZEE Clean is a superb all-natural non-toxic Mortar and Concrete Dissolver designed to melt away any type of cementitious material, whether concrete, stucco, mortar, or grout.

Use on mixers and pumps after each use. Save labor cleaning tools and equipment, and save your equipment from the damage hammers and chisels cause.

EZEE CLEAN, EZEE TO USE

Soak the buildup, let EZEE Clean work awhile, hit it once or twice with a brush and wash it away.

Dilute and neutralize with only water.



100% biodegradable
"green" product



Contains No
muriatic, sulfuric,
or phosphoric acids



Will not harm
painted surfaces,
metal, plastic,
plants or
vegetation



Dilute and neutralize
with only water

BEFORE



AFTER



EZEE CLEAN REMOVES:

- Cured concrete
- Mortar
- Stucco
- Grout
- Thin set
- Efflorescence from pavers and bricks

EZEE CLEAN WORKS ON:

- Trowels
- Mixers
- Shovels
- Wheelbarrows
- Mud Tubs
- Pumps
- Molds
- Forms
- Concrete Saws
- Cement trucks
- Augers
- Conveyors
- Scaffold
- Silos
- Aerial Lifts
- Wall and Deck Splashes

53

TOGETHER WE BUILD

IMER GROUP SOLUTIONS

We build machines and equipment that let construction site professionals work with less effort, greater safety, and greater performance.

From batching to cutting, from concrete transport to plaster spraying, from lifting people to earthmoving, we are building many different product lines united under the IMER Group brand with the goal to be the foremost specialists in each of our product lines. We have the expertise to help you select the right products for your business. **Let's build something together!**

IMER ACCESS SCISSOR LIFTS & TRACKED AERIAL PLATFORMS

ELECTRIC SCISSOR LIFTS Series IM 47

46' (13.96m) 52' (15.85m)

IM 47-02 IM 47-03

OPTIONAL EQUIPMENT

- Hydraulic pump with 2000W motor
- Hydraulic pump with 3000W motor
- Hydraulic pump with 4000W motor
- Hydraulic pump with 5000W motor
- Hydraulic pump with 6000W motor
- Hydraulic pump with 7000W motor
- Hydraulic pump with 8000W motor
- Hydraulic pump with 9000W motor
- Hydraulic pump with 10000W motor

ATRIUM LIFT Series IM R19

62' (18.89m) 360°

IM R19

STANDARD EQUIPMENT

- Hydraulic pump with 2000W motor
- Hydraulic pump with 3000W motor
- Hydraulic pump with 4000W motor
- Hydraulic pump with 5000W motor
- Hydraulic pump with 6000W motor
- Hydraulic pump with 7000W motor
- Hydraulic pump with 8000W motor
- Hydraulic pump with 9000W motor
- Hydraulic pump with 10000W motor

IMER CONCRETE BATCHING PLANT & READY-MIX CATALOG

IMER GROUP MIXERS

RELIABILITY AND PERFECT MIXING

Mixing is the most important phase in the concrete production process.

IMER GROUP Mixers are the result of the most advanced technical research and development, combining many thousands of different tests, always continuously and specifically updated.

Consistent, sturdy, reliable and versatile design, IMER Mixers are well-suited to all types of concrete, allowing for maximum flexibility and ease of adaptation to various production needs.

PLANETARY MIXERS ORUMS

IMER ORUMS planetary mixers with central motor can handle the very best type of concrete with maximum flexibility, speed and precision. They are used in the ready mix and precast concrete and in the production of materials such as glass, ceramics, refractory material, and so on.

TWIN SHAFT MIXERS ORUMD

Thanks to our experience with planetary mixers and to the introduction of technological innovations, the horizontal dual shaft mixers produce a very high quality concrete with low water content, low shrinkage, and high strength.

The ORUMD mixer line is equipped with the most advanced mixing system, making it ideal for concrete production.

IMER CONCRETE MOBILE BATCHING PLANT CATALOG

ORULJUST WITH SELF-LOADING ARM

The arm is set at a very wide range of angles and can be folded back to a 90° angle for transport.

The self-loading arm is the only one of its kind in the world. It is the only one that can be folded back to a 90° angle for transport.

The self-loading arm is the only one of its kind in the world. It is the only one that can be folded back to a 90° angle for transport.

ORULJUST WITH WHEELS

IMER ORULJUST WITH WHEELS is a mobile batching plant with a self-loading arm. It is the only one of its kind in the world. It is the only one that can be folded back to a 90° angle for transport.

IMER CONCRETE TRUCK MIXERS CATALOG

TRUCK MIXERS

THE WIDEST RANGE ON THE MARKET, GREAT PERFORMANCES AND TOTAL COMPLIANCE WITH REGULATIONS

The IMER GROUP Truck Mixers are a well-known, proven, and proven design. They are the result of the most advanced technical research and development, combining many thousands of different tests, always continuously and specifically updated.

Consistent, sturdy, reliable and versatile design, IMER Truck Mixers are well-suited to all types of concrete, allowing for maximum flexibility and ease of adaptation to various production needs.




IMER PARTS - ONLINE SUPPORT

ONE WEBSITE. ALL PARTS.

The new **IMER Parts** website has been launched offering customers the ability to search for parts by the part number, description or serial number, then easily locate the parts you need using the 3-D exploded view of the equipment diagrams. This website also includes a section for equipment user guides and manuals, and a Help Desk.

Get started today. Log in, create your account, and enjoy **ordering parts, made easy.**

www.imerglobalcustomercare.com

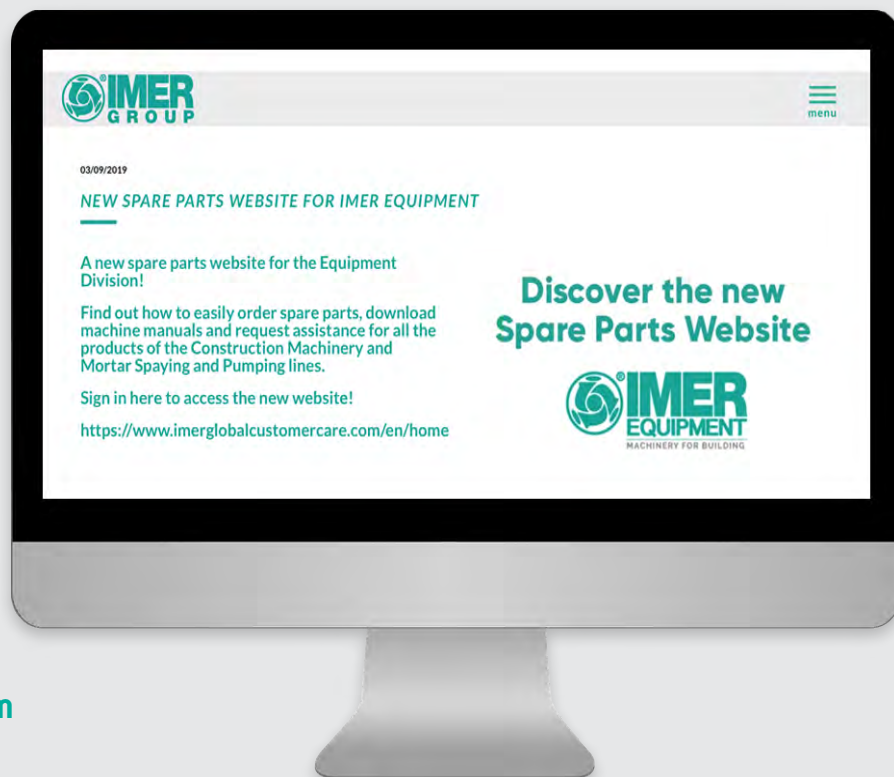

IMER SUPPORT

GOT QUESTIONS?

Call Us Toll-Free (800) 275-5463

Call our toll-free phone number to speak to an IMER Representative regarding Sales, Customer Service, or Parts.

We can also help you locate a dealer, a service center, or a sales representative closest to you.



TOLL FREE: 800.275.5463
WWW.IMERUSA.COM



TOGETHER WE BUILD

IMER USA, Inc.
423 Bank Street, Suite 180
Southlake, TX 76092
Tel. (800) 275-5463 - Fax (301) 336-6687
www.imerusa.com



IMER Group | USA (IMER USA, Inc.) reserves the right to change the information contained herein without prior notice when considered justified. The data and dimensions are not to be considered as binding. The illustrations may include accessories and could be slightly different from the standard versions of the equipment.

© Copyright by IMER Group | USA