



Vibratory Tampers

SRV 590 / SRV 620 / SRV 660






Maximum operating safety.
Multi-stage air filtration system with cyclone pre-cleaner¹, pre-filter² and main filter³. The air filter of the engine manufacture is an additional security

Photo: SRV 620

Additional features

- ▶ A durable tamping system with an active oil lubrication, providing reliable oil support to all components in the crankcase.
- ▶ Damage to the tamping system is being prevented through block impact protection.
- ▶ The highly efficient air filtration system with cyclone pre-cleaner protects the engine against dirt.
- ▶ Low engine oil warning (SRV 590/620). During start-up, the electronics reliably measures the engine oil level. An LED lights up to indicate a lack of engine oil.
- ▶ Easy transport through carrying handles and rolls.
- ▶ High operating comfort through minimized hand-arm vibrations.
- ▶ Optional extras: hour meter, wheel kit, rammer foot extension.

Weight: 136-165lbs
Base Plate: 11"
Engine: Honda GXR 120 Four Stroke
Multi-stage air filtration system

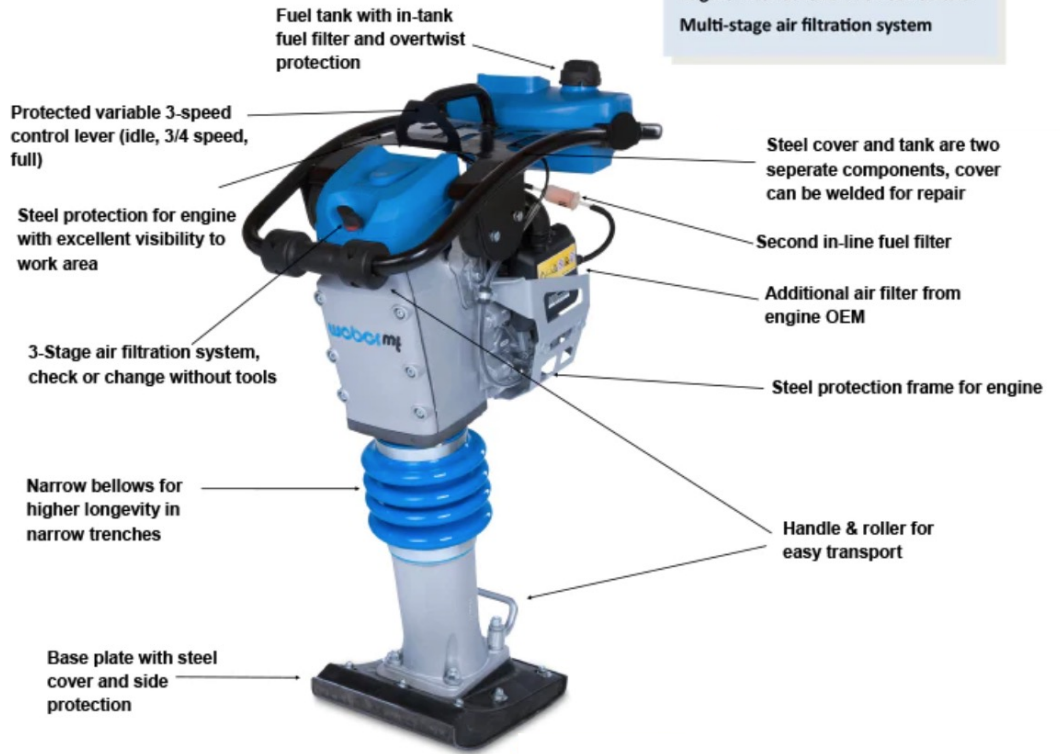

Technical data

Typ		SRV 590	SRV 620	SRV 660
Operating weight CECE	kg (lbs)	62 (136)	66 (145)	75 (165)
Shoe width	mm (in.)	280 (11)	280 (11)	280 (11)
Percussion	per min.	700	700	670
Impact Force	lbs.	4,114	4,092	4,699
Stroke	mm (in.)	64 (2.5)	65(2.6)	70 (2.8)
Engine manufacturer		Honda GXR 120	Honda GXR 120	Honda GXR 120
Engine type		4-stroke gasoline	4-stroke gasoline	4-stroke gasoline
Engine output max.	kW (HP)	2.8 (3.8)	2.8 (3.8)	2.8 (3.8)
Power output at operating speed	kW (HP) at r.p.m.	2.6 (3.6) at 4,100 rpm	2.6 (3.6) at 4,100	2.6 (3.6) at 4,100

