

## SECONDARY CONTAINMENT BERMS

## PORTABLE

### JOBSITE PROTECTION AGAINST CONTAMINATION, SMALL LEAKS, AND SPILLS

Multiple Hyprene™ fabric types are available to prevent ground contamination from leaks and spills of hydrocarbons, chemicals, or other potentially environmentally damaging materials.

Use Portable Secondary Containment Berms under valves, pails, barrels, and small equipment such as heaters, generators, and light stands to keep your worksite within regulations and clean by containing leaks and spills.

Berm walls are 6" plank or 3" round enclosed foam that can be driven over and retain their shape.

Quick, easy setup, and lightweight for easy transport and storage.

#### GEAR POINTS:

**Outwork. Outperform. Overachieve.**



Prevent ground contamination from leaks and spills of hydrocarbons, chemicals or other potentially environmentally damaging materials.



Multiple Hyprene™ fabric types are available to offer the right combination of protection and value for any project.




Water resistant, chemical resistant and hydrocarbon resistant.



In-stock, ready-to-order products and custom configurations available.



Compact and lightweight for easy transport and storage.

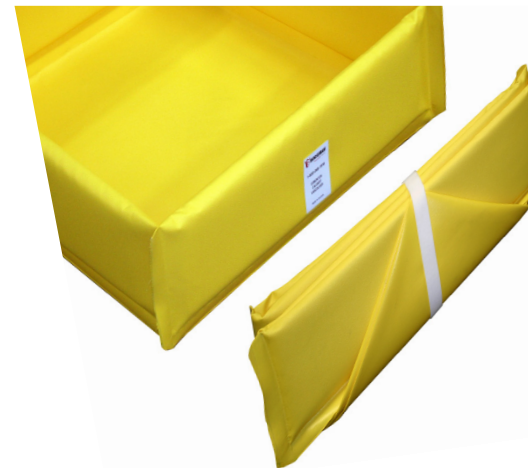

MADE IN CANADA



## SECONDARY CONTAINMENT BERMS

## PORTABLE

- Quick and easy setup
- Compact and lightweight for easy transport and storage
- Tested welds help ensure maximum performance
- Berm walls are 6" plank or 3" round enclosed foam that can be driven over and retain their shape
- Available in stock with Hyprene™ XC fabric and 6" foam-plank configuration in sizes from 2' x 2' to 6' x 8'
- Custom fabric options and size configurations available to meet specific containment requirements
- Available in four fabric options:
  - Hyprene™ XC (yellow) Best for water, oil, and cold temperatures; rated to -67°F (-55°C)
  - Hyprene™ CR (orange) Best for chemicals, fuel, and acids; rated to -13°F (-25°C)
  - Hyprene™ ST (multiple colors) Good for water and oil; rated to -49°F (-45°C)
  - Hyprene™ XR-5 (black) Best for chemicals, fuel, and abrasion resistance; rated to -22°F (-30°C)



<b>SIZE (WIDTH)</b>	2' - 6'
<b>SIZE (LENGTH)</b>	2' - 8'
<b>BERM WALLS</b>	6" plank or 3" round foam
<b>MATERIAL</b>	Multiple Hyprene™ fabric types
<b>COLD CRACK</b>	-13°F (-25°C) to -67°F (-55°C)



PRODUCT	ITEM NUMBER	COLD CRACK	SIZE	WALL	AVAILABILITY
Hyprene™ XC	412236	-67°F (-55°C)	2' x 2'	6" Plank	In Stock
Hyprene™ XC	412239	-67°F (-55°C)	2' x 4'	6" Plank	In Stock
Hyprene™ XC	412240	-67°F (-55°C)	3' x 3'	6" Plank	In Stock
Hyprene™ XC	412241	-67°F (-55°C)	4' x 4'	6" Plank	In Stock
Hyprene™ XC	412242	-67°F (-55°C)	4' x 6'	6" Plank	In Stock
Hyprene™ XC	463063	-67°F (-55°C)	4' x 8'	6" Plank	In Stock
Hyprene™ XC	412243	-67°F (-55°C)	6' x 6'	6" Plank	In Stock
Hyprene™ XC	412244	-67°F (-55°C)	6' x 8'	6" Plank	In Stock

